Exhibit 1

(12) United States Patent

Raleigh et al.

(10) Patent No.: US 9,609,510 B2

(45) **Date of Patent:** Mar. 28, 2017

(54) AUTOMATED CREDENTIAL PORTING FOR MOBILE DEVICES

(71) Applicant: Headwater Partners I LLC, Redwood

Shores, CA (US)

(72) Inventors: Gregory G. Raleigh, Woodside, CA

(US); James Lavine, Corte Madera, CA

(US)

(73) Assignee: Headwater Research LLC, Tyler, TX

(US)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 364 days.

(21) Appl. No.: 14/208,236

(22) Filed: Mar. 13, 2014

(65) Prior Publication Data

US 2014/0273965 A1 Sep. 18, 2014

Related U.S. Application Data

- (60) Provisional application No. 61/785,988, filed on Mar. 14, 2013.
- (51) **Int. Cl. H04M 1/66** (2006.01) **H04W 12/04** (2009.01)

(Continued)

(52) **U.S. Cl.** CPC *H04W 12/04* (2013.01); *H04L 63/062* (2013.01); *H04W 12/06* (2013.01)

(58) Field of Classification Search CPC H04W 12/06; H04W 12/08; H04W 12/12; H04L 63/08

(Continued)

(56) References Cited

U.S. PATENT DOCUMENTS

5,131,020 A 5,283,904 A 7/1992 Liebesny et al. 2/1994 Carson et al. (Continued)

FOREIGN PATENT DOCUMENTS

CA 2688553 A1 12/2008 CN 1310401 A 8/2001 (Continued)

OTHER PUBLICATIONS

VerizonWireless.com news, "Verizon Wireless Adds to Portfolio of Cosumer-Friendly Tools With Introduction of Usage Controls, Usage Controls and Chaperone 2.0 Offer Parents Full Family Security Solution," Aug. 18, 2008.


(Continued)

Primary Examiner — Andrew Joseph Rudy (74) Attorney, Agent, or Firm — James E. Harris

(57) ABSTRACT

Devices, systems, and non-transitory computer-readable storage media for updating wireless device credentials, the wireless device comprising: a user interface, memory configured to store one or more credentials for enabling the wireless device to obtain one or more services over a wireless access network, and one or more processors configured to execute one or more machine-executable instructions that, when executed by the one or more processors, cause the one or more processors to obtain an indication of a user request to replace a particular credential with a target credential, detect a network-provisioning state change, determine that the particular credential does not match the target credential, initiate a programming session with a network element over a wireless access network, obtain an updated credential from the network element, and assist in storing the updated credential in memory.

48 Claims, 16 Drawing Sheets

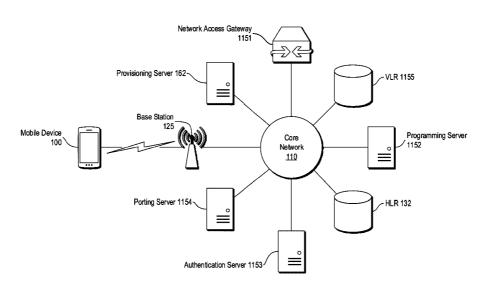

(51)	Int. Cl.			6,574,465	B2	6/2003	Marsh et al.
. /	H04L 29/06		(2006.01)	6,578,076			Putzolu
	H04W 12/06		(2009.01)	6,581,092			Motoyama et al.
(58)	Field of Classif	icatior	n Search	6,598,034 6,601,040		7/2003 7/2003	
	USPC 4	55/40:	5, 406, 411, 414.1, 432.1, 437	6,603,969			Vuoristo et al.
			r complete search history.	6,606,744	B1		Mikurak
			•	6,628,934			Rosenberg et al.
(56)	Re	eferen	ces Cited	6,631,122 6,636,721			Arunachalam et al. Threadgill et al.
	II.C. DA	revie	DOCUMENTES	6,639,975			O'Neal et al.
	U.S. PA	IENI	DOCUMENTS	6,640,097	B2	10/2003	Corrigan et al.
	5,325,532 A 6	/1994	Crosswy et al.	6,640,334			Rasmussen
			Shuen	6,650,887 6,651,101			McGregor et al. Gai et al.
			McGregor et al.	6,654,786			Fox et al.
			Makkonen et al.	6,654,814	B1	11/2003	Britton et al.
			Ludwig et al. Zancho	6,658,254			Purdy et al.
			Zancho et al.	6,662,014 6,678,516		1/2003	Waish Nordman et al.
			Baldwin et al.	6,683,853			Kannas et al.
			Briancon et al.	6,684,244	B1		Goldman et al.
			Gottlieb et al. Vanttila et al.	6,690,918			Evans et al.
			Zancho	6,697,821 6,725,031			Ziff et al. Watler et al.
			Fastenrath	6,725,256			Albal et al.
			Ginter et al. Buhrmann et al.	6,735,206	В1		Oki et al.
			Dulman	6,748,195			Phillips
	, ,		Buhrmann et al.	6,748,437 6,751,296			Mankude et al. Albal et al.
			Newman et al.	6,754,470			Hendrickson et al.
			Bollella	6,757,717	B1		Goldstein
			Abraham et al. Crosskey et al.	6,763,000		7/2004	
			Strawczynski et al.	6,763,226 6,765,864		7/2004	McZeal, Jr. Natarajan et al.
			Krist et al.	6,765,925		7/2004	Sawyer et al.
	, ,		Bartoli et al. Wilt et al.	6,782,412	B2	8/2004	Brophy et al.
			Tamura	6,785,889	B1		Williams
	· · · · · · · · · · · · · · · · · · ·		Denker et al.	6,792,461 6,829,596		12/2004	Hericourt Frazee
			Vaid et al.	6,829,696			Balmer et al.
			Skoog Dent et al.	6,839,340			Voit et al.
			Haddock et al.	6,873,988			Herrmann et al. Ambe et al.
	6,115,823 A 9		Velasco et al.	6,876,653 6,879,825		4/2005	
			Wong et al.	6,882,718		4/2005	
			Meltzer et al. Feuerstein et al.	6,885,997			Roberts
			Jackowski et al.	6,901,440			Bimm et al. Weschler
	6,148,336 A 11	/2000	Thomas et al.	6,920,455 6,922,562			Ward et al.
		/2000		6,928,280			Xanthos et al.
			Voit et al. Mcintosh	6,934,249			Bertin et al.
			McGregor et al.	6,934,751 6,947,723		8/2005 9/2005	Jayapalan et al. Gurnani et al.
	6,226,277 B1 5	/2001	Chuah	6,947,723			Hegli et al.
			Garland et al.	6,952,428	B1	10/2005	Necka et al.
			Williams Abu-Amara et al.	6,957,067			Iyer et al.
	6,381,316 B2 4	/2002	Joyce et al.	6,959,393	B2 *	10/2005	Hollis H04L 63/0272 709/223
			Daly et al.	6,965,667	B2	11/2005	Trabandt et al.
			Lincke et al. Lazaridis et al.	6,965,872	В1	11/2005	Grdina
			Wiedeman	6,967,958			Ono et al.
	6,438,575 B1 8		Khan et al.	6,970,692 6,982,733		11/2005	Tysor McNally et al.
		/2002		6,983,370			Eaton et al.
			Sanchez Ahmadvand	6,996,076	B1	2/2006	Forbes et al.
			Vaid et al.	6,996,393			Pyhalammi et al.
	6,505,114 B2 1	/2003	Luciani	6,998,985 7,002,920			Reisman et al. Ayyagari et al.
			Gerszberg et al.	7,002,920			Rose et al.
			Benson et al. Sato et al.	7,013,469	B2	3/2006	Smith et al.
			Cahill et al.	7,017,189			DeMello et al.
	6,539,082 B1 3	/2003	Lowe et al.	7,024,200			McKenna et al.
			Gerszberg et al.	7,024,460 7,027,055			Koopmas et al. Anderson et al.
			Peirce et al. Gerszberg et al.	7,027,033			Nabkel et al.
			Yano et al.	7,032,072			Quinn et al.
	6,570,974 B1 5	/2003	Gerszberg et al.	7,039,027	B2	5/2006	Bridgelall
	6,574,321 B1 6	/2003	Cox et al.	7,039,037	B2	5/2006	Wang et al.

(56)		Referen	ices Cited	7,346,410 B2		Uchiyama
				7,349,695 B2		Oommen et al.
	U.S	. PATENT	DOCUMENTS	7,353,533 B2		Wright et al.
				7,356,011 B1		Waters et al.
	39,403 B2	5/2006		7,356,337 B2		Florence
	39,713 B1		Van Gunter et al.	7,366,497 B2 7,366,654 B2		Nagata Moore
7,04	42,988 B2		Juitt et al.	7,369,848 B2	5/2008	
	43,225 B1		Patel et al.	7,369,856 B2 *		Ovadia H04L 41/0213
	43,226 B2		Yamauchi Walai a da al	7,505,650 D2	3/2000	455/43
	43,268 B2		Yukie et al.	7,373,136 B2	5/2008	Watler et al.
	47,276 B2 58,022 B1		Liu et al. Carolan et al.	7,373,179 B2		Stine et al.
	58,968 B2		Rowland et al.	7,379,731 B2		Natsuno et al.
	68,600 B2	6/2006		7,388,950 B2		Elsey et al.
	69,248 B2	6/2006		7,389,412 B2		Sharma et al.
	82,422 B1		Zirngibl et al.	7,391,724 B2		Alakoski et al.
	84,775 B1	8/2006		7,395,244 B1	7/2008	Kingsford
	92,696 B1		Hosain et al.	7,401,338 B1		Bowen et al.
	95,754 B2	8/2006	Benveniste	7,403,763 B2	7/2008	
7,10	02,620 B2	9/2006	Harries et al.	7,409,447 B1		Assadzadeh
7,11	10,753 B2		Campen	7,409,569 B2		Illowsky et al.
	13,780 B2	9/2006	McKenna et al.	7,411,930 B2		Montojo et al.
7,11	13,997 B2		Jayapalan et al.	7,418,253 B2		Kavanah
	33,386 B2		Holur et al.	7,418,257 B2	8/2008	
	33,695 B2	11/2006		7,421,004 B2	9/2008	
	36,361 B2		Benveniste	7,428,750 B1*	9/2008	Dunn G06F 21/4
	39,569 B2	11/2006		7 440 422 D2	10/2009	726/8
	42,876 B2	11/2006	Trossen et al.	7,440,433 B2 7,444,669 B1		Rink et al. Bahl et al.
	49,229 B1	12/2006		7,444,669 B1 7,450,591 B2		Korling et al.
	49,521 B2 51,764 B1		Sundar et al. Heinonen et al.	7,450,927 B1		Creswell et al.
	58,792 B1		Cook et al.	7,454,191 B2		Dawson et al.
	62,237 B1		Silver et al.	7,457,265 B2		Julka et al.
	67,078 B2		Pourchot	7,457,870 B1		Lownsbrough et al.
	74,156 B1		Mangal	7,460,837 B2	12/2008	
	74,174 B2		Boris et al.	7,466,652 B2		Lau et al.
	77,919 B1		Truong H04L 49/602	7,472,189 B2	12/2008	Mallya et al.
,	,		709/220	7,478,420 B2	1/2009	Wright et al.
7,18	80,855 B1	2/2007	Lin	7,486,185 B2		Culpepper et al.
	81,017 B1	2/2007	Nagel et al.	7,486,658 B2		Kumar
	91,248 B2		Chattopadhyay et al.	7,493,659 B1		Wu et al.
7,19	97,321 B2	3/2007	Erskine et al.	7,496,652 B2		Pezzutti
7,20	00,112 B2		Sundar et al.	7,499,438 B2		Hinman et al.
7,20	03,169 B1		Okholm et al.	7,499,537 B2		Elsey et al.
	03,721 B1		Ben-Efraim et al.	7,502,672 B1	3/2009	
	03,752 B2		Rice et al.	7,505,795 B1		Lim et al.
7,21	12,491 B2	5/2007	Koga	7,508,799 B2 7,512,128 B2	3/2009	Sumner et al. DiMambro et al.
	19,123 B1		Fiechter et al.	7,512,128 B2 7,512,131 B2		Svensson et al.
	22,190 B2		Klinker et al.	7,515,608 B2		Yuan et al.
	22,304 B2		Beaton et al.	7,515,926 B2	4/2009	Bu et al.
	24,968 B2 28,354 B2		Dobson et al.	7,515,920 B2 7,516,219 B2		Moghaddam et al.
	28,334 B2 36,780 B2	6/2007	Chambliss et al.	7,516,213 B2 7,526,541 B2		Roese et al.
	42,668 B2		Kan et al.	7,529,204 B2		Bourlas et al.
	42,920 B2		Morris	7,535,880 B1		Hinman et al.
	45,901 B2		McGregor et al.	7,536,695 B2		Alam et al.
	48,570 B2		Bahl et al.	7,539,132 B2		Werner et al.
	51,218 B2		Jorgensen	7,540,408 B2	6/2009	Levine et al.
	60,382 B1		Lamb et al.	7,545,782 B2	6/2009	Rayment et al.
	66,371 B1		Amin et al.	7,546,460 B2	6/2009	
7,27	71,765 B2	9/2007	Stilp et al.	7,546,629 B2		Albert et al.
7,27	72,660 B1		Powers et al.	7,548,976 B2		Bahl et al.
	80,816 B2	10/2007	Fratti et al.	7,551,922 B2		Roskowski et al.
	80,818 B2		Clayton	7,554,983 B1		Muppala
	83,561 B1		Picher-Dempsey	7,555,757 B2	6/2009	Smith et al.
	83,963 B1		Fitzpatrick et al.	7,561,899 B2	7/2009	
	86,834 B2	10/2007		7,562,213 B1		Timms Holland et al.
	86,848 B2		Vireday et al.	7,564,799 B2 7,565,141 B2		Holland et al. Macaluso
	89,489 B1		Kung et al.	7,505,141 B2 7,574,509 B2		Nixon et al.
	90,283 B2		Copeland, III	7,574,731 B2		Fascenda
	10,424 B2		Gehring et al.	7,574,731 B2 7,577,431 B2	8/2009	
	13,237 B2		Bahl et al.			Mishra et al.
	17,699 B2		Godfrey et al.	7,580,356 B1		
	18,111 B2	1/2008		7,580,857 B2		VanFleet et al.
	20,029 B2		Rinne et al.	7,583,964 B2	9/2009	
	22,044 B2		Hrastar	7,586,871 B2		Hamilton et al.
	24,447 B1		Morford	7,593,417 B2	9/2009	
	25,037 B2	1/2008	Lawson	7,593,730 B2	9/2009	Khandelwal et al.
	36,960 B2	0/0000	Zavalkovsky et al.	7,599,288 B2	10/2009	Cole et al.

(56)			Referen	ces Cited	7,797,401 7,801,523			Stewart et al. Kenderov
	1	US	PATENT	DOCUMENTS	7,801,323			Kende et al.
		0.0.	TTTTTTT	DOCUMENTS	7,801,985	B1	9/2010	Pitkow et al.
	99,714			Kuzminskiy	7,802,724		9/2010	
	02,746			Calhoun et al. Roskowski et al.	7,805,140 7,805,606			Friday et al. Birger et al.
	09,030			Ying et al.	7,809,351			Panda et al.
7,6	10,047	B2	10/2009	Hicks, III et al.	7,817,615			Breau et al.
	10,328			Haase et al.	7,817,983 7,822,837			Cassett et al. Urban et al.
	10,396 14,051			Taglienti et al. Glaum et al.	7,822,837			Sood et al.
	17,516			Huslak et al.	7,826,607	B1		de Carvalho Resende et al.
	20,041			Dunn et al.	7,843,831 7,843,843			Morrill et al. Papp, III et al.
	20,065 20,162			Falardeau Aaron et al.	7,843,843			Oh et al.
	27,314			Carlson et al.	7,844,728	B2		Anderson et al.
	27,767			Sherman et al.	7,848,768			Omori et al. Koch et al.
	27,872			Hebeler et al. Tysowski	7,849,161 7,849,477			Cristofalo et al.
	33,438 34,388			Archer et al.	7,853,255	B2		Karaoguz et al.
7,6	36,574	B2	12/2009	Poosala	7,856,226			Wong et al.
	36,626			Oesterling et al.	7,860,088 7,865,182		1/2010	Lioy Macaluso
	43,411 44,151			Andreasen et al. Jerrim et al.	7,865,187		1/2011	Ramer et al.
	44,267			Ylikoski et al.	7,868,778			Kenwright
	47,047			Moghaddam et al.	7,873,001 7,873,344		1/2011	Silver Bowser et al.
	50,137 53,394			Jobs et al. McMillin	7,873,705		1/2011	
	57,920			Arseneau et al.	7,877,090	B2	1/2011	
7,6	60,419	В1	2/2010		7,881,199 7,881,697			Krstulich
	61,124 64,494		2/2010 2/2010	Ramanathan et al.	7,882,029		2/2011	Baker et al. White
	68,176		2/2010		7,886,047	B1	2/2011	Potluri
7,6	68,612	В1	2/2010	Okkonen	7,889,384			Armentrout et al.
	68,903			Edwards et al.	7,890,084 7,890,111			Dudziak et al. Bugenhagen
	76,673 80,086		3/2010	Weller et al.	7,894,431			Goring et al.
	84,370		3/2010		7,899,039			Andreasen et al.
	85,131			Batra et al.	7,899,438 7,903,553		3/2011	Baker et al.
	85,254 85,530			Pandya Sherrard et al.	7,907,970			Park et al.
	93,720			Kennewick et al.	7,911,975			Droz et al.
	97,540			Haddad et al.	7,912,025 7,912,056			Pattenden et al. Brassem
	10,932		5/2010	Muthuswamy et al.	7,920,529			Mahler et al.
	19,966			Luft et al.	7,921,463	B2		Sood et al.
	20,206			Devolites et al.	7,925,778 7,929,959			Wijnands et al. DeAtley et al.
	20,464		5/2010	Batta Gopi et al.	7,929,960			Martin et al.
	20,960			Pruss et al.	7,929,973	B2		Zavalkovsky et al.
	24,716		5/2010		7,930,327 7,930,446			Craft et al. Kesselman et al.
	25,570 29,326		5/2010	Lewis Sekhar	7,933,274			Verma et al.
	30,123			Erickson et al.	7,936,736	B2	5/2011	Proctor, Jr. et al.
7,7	34,784	В1	6/2010	Araujo et al.	7,937,069 7,937,450		5/2011 5/2011	Rassam
	42,406 46,854			Muppala Ambe et al.	7,940,685			Breslau et al.
	47,240			Briscoe et al.	7,940,751	B2	5/2011	Hansen
	47,699			Prueitt et al.	7,941,184 7,944,948			Prendergast et al. Chow et al.
	47,730 52,330			Harlow Olsen et al.	7,944,948			Baker et al.
	56,056			Kim et al.	7,945,240	B1	5/2011	Klock et al.
7,7	56,534	B2	7/2010	Anupam et al.	7,945,945			Graham et al.
	56,757			Oakes, III	7,948,952 7,948,953			Hurtta et al. Melkote et al.
	60,137			Martucci et al. Kung et al.	7,948,968	B2		Voit et al.
7,7	60,861	В1	7/2010	Croak et al.	7,949,529			Weider et al.
	65,294			Edwards et al.	7,953,808 7,953,877			Sharp et al. Vemula et al.
	70,785			Jha et al. Helfman	7,957,020			Mine et al.
7,7	74,456	В1		Lownsbrough et al.	7,957,381	B2		Clermidy et al.
7,7	78,176	B2	8/2010	Morford	7,957,511			Drudis et al.
	78,643			Laroia et al.	7,958,029 7,962,622			Bobich et al. Friend et al.
	92,257			Vanier et al. Kozisek	7,962,622			Swan et al.
7,7	92,708	B2	9/2010		7,966,405			Sundaresan et al.
	97,060			Grgic et al.	7,969,950			Iyer et al.
7,7	97,204	B2	9/2010	Balent	7,970,350	B2	6/2011	Sheynman et al.

(56)	Referer	nces Cited	8,116,223 B2		Tian et al.
U.S	S. PATENT	DOCUMENTS	8,116,749 B2 8,116,781 B2		Proctor, Jr. et al. Chen et al.
0	3. 11.11.L1.1	DOCOMENTS	8,122,128 B2		Burke, II et al.
7,970,426 B2		Poe et al.	8,122,249 B2 8,125,897 B2		Falk et al. Ray et al.
7,974,624 B2 7,975,184 B2		Gallagher et al. Goff et al.	8,126,123 B2		Cai et al.
7,978,627 B2		Taylor et al.	8,126,396 B2		Bennett
7,978,686 B2		Goyal et al.	8,126,476 B2 8,126,722 B2		Vardi et al. Robb et al.
7,979,069 B2 7,984,130 B2		Hupp et al. Bogineni et al.	8,130,793 B2		Edwards et al.
7,984,511 B2		Kocher et al.	8,131,256 B2		Martti et al.
7,986,935 B1		D'Souza et al.	8,131,281 B1 8,131,840 B1		Hildner et al. Denker
7,987,496 B2 7,987,510 B2		Bryce et al. Kocher et al.	8,131,858 B2		Agulnik et al.
7,990,049 B2	8/2011	Shioya	8,132,256 B2	3/2012	Bari
8,000,276 B2		Scherzer et al.	8,134,954 B2 8,135,388 B1		Godfrey et al. Gailloux et al.
8,000,318 B2 8,005,009 B2		Wiley et al. McKee et al.	8,135,392 B2		Marcellino et al.
8,005,459 B2		Balsillie	8,135,657 B2		Kapoor et al.
8,005,726 B1			8,140,690 B2 8,144,591 B2		Ly et al. Ghai et al.
8,005,913 B1 8,005,988 B2		Carlander Maes	8,145,194 B2		Yoshikawa et al.
8,010,080 B1		Thenthiruperai et al.	8,149,823 B2		Turcan et al.
8,010,081 B1		Roskowski	8,150,394 B2 8,150,431 B2		Bianconi et al. Wolovitz et al.
8,010,082 B2 8,015,133 B1		Sutaria et al. Wu et al.	8,151,205 B2		Follmann et al.
8,015,234 B2		Lum et al.	8,155,155 B1		Chow et al.
8,019,687 B2		Wang et al.	8,155,620 B2 8,155,666 B2		Wang et al. Alizadeh-Shabdiz
8,019,820 B2 8,019,846 B2	9/2011	Son et al. Roelens et al.	8,155,670 B2		Fullam et al.
8,019,868 B2	9/2011	Rao et al.	8,156,206 B2		Kiley et al.
8,019,886 B2		Harrang et al.	8,160,015 B2 8,160,056 B2		Rashid et al. Van der Merwe et al.
8,023,425 B2 8,024,397 B1		Raleigh Erickson et al.	8,160,598 B2		Savoor
8,027,339 B2		Short et al.	8,165,576 B2		Raju et al.
8,031,601 B2		Feroz et al.	8,166,040 B2 8,166,554 B2	4/2012 4/2012	Brindisi et al.
8,032,168 B2 8,032,409 B1		Ikaheimo Mikurak	8,170,553 B2		Bennett
8,032,899 B2		Archer et al.	8,174,378 B2		Richman et al.
8,036,387 B2		Kudelski et al.	8,174,970 B2 8,175,574 B1		Adamczyk et al. Panda et al.
8,036,600 B2 8,044,792 B2		Garrett et al. Orr et al.	8,180,333 B1		Wells et al.
8,045,973 B2	10/2011	Chambers	8,180,881 B2		Seo et al.
8,046,449 B2		Yoshiuchi	8,180,886 B2 8,184,530 B1		Overcash et al. Swan et al.
8,050,275 B1 8,050,690 B2			8,184,590 B2		Rosenblatt
8,050,705 B2	11/2011	Sicher et al.	8,185,088 B2		Klein et al.
8,059,530 B1			8,185,093 B2 8,185,127 B1		Jheng et al. Cai et al.
8,060,463 B1 8,064,418 B2		Spiegel Maki	8,185,152 B1		Goldner
8,064,896 B2	11/2011	Bell et al.	8,185,158 B2		Tamura et al.
8,065,365 B2	11/2011	Saxena et al. Shan et al.	8,190,122 B1 8,190,675 B2		Alexander et al. Tribbett
8,068,824 B2 8,068,829 B2		Lemond et al.	8,191,106 B2	5/2012	Choyi et al.
8,073,427 B2	2 12/2011	Koch et al.	8,191,116 B1		Gazzard Wynn et al.
8,073,721 B1 8,078,140 B2		Lewis Baker et al.	8,191,124 B2 8,194,549 B2		Huber et al.
8,078,140 B2		Lemond et al.	8,194,553 B2	6/2012	Liang et al.
8,085,808 B2		Brusca et al.	8,194,572 B2 8,194,581 B1		Horvath et al. Schroeder et al.
8,086,398 B2 8,086,497 B1	2 12/2011	Sanchez et al. Oakes, III	8,195,093 B2		Garrett et al.
8,086,791 B2	2 12/2011	Caulkins	8,195,153 B1	6/2012	Frencel et al.
8,090,359 B2		Proctor, Jr. et al.	8,195,163 B2 8,195,661 B2		Gisby et al. Kalavade
8,090,616 B2 8,094,551 B2		Proctor, Jr. et al. Huber et al.	8,196,199 B2		Hrastar et al.
8,095,112 B2		Chow et al.	8,200,163 B2		Hoffman
8,095,124 B2			8,200,200 B1 8,200,509 B2		Belser et al. Kenedy et al.
8,095,640 B2 8,095,666 B2		Guingo et al. Schmidt et al.	8,200,775 B2		Moore
8,098,579 B2	1/2012	Ray et al.	8,200,818 B2	6/2012	Freund et al.
8,099,077 B2		Chowdhury et al.	8,204,190 B2		Bang et al.
8,099,517 B2 8,102,814 B2		Jia et al. Rahman et al.	8,204,505 B2 8,204,794 B1		Jin et al. Peng et al.
8,103,285 B2		Kalinan et al. Kalhan	8,208,788 B2		Ando et al.
8,104,080 B2	1/2012	Burns et al.	8,208,919 B2		Kotecha
8,107,953 B2		Zimmerman et al.	8,213,296 B2		Shannon et al.
8,108,520 B2 8,112,435 B2		Ruutu et al. Epstein et al.	8,213,363 B2 8,214,536 B2	7/2012	Ying et al. Zhao
0,112, 1 33 D2	. 2/2012	Lpstom et al.	5,211,550 DZ	112012	

(56)		Referen	ces Cited	8,351,592			Freeny, Jr. et al.
	***		Doorn cover	8,351,898			Raleigh
	U.S. I	PATENT	DOCUMENTS	8,352,360 8,352,630	B2	1/2013	De Judicibus et al.
9 210	134 B2	7/2012	Maharajh et al.	8,352,980	B2		Howeroft
	655 B2		Heinz et al.	8,353,001	B2	1/2013	Herrod
	741 B1		Bartlett et al.	8,355,696			Olding et al.
	382 B2		Bultman	8,356,336 8,358,638			Johnston et al.
	773 B2	7/2012		8,358,975			Scherzer et al. Bahl et al.
	818 B2 394 B2		Chase et al. Karlberg	8.363.658			Delker et al.
8,229,	914 B2		Ramer et al.	8,363,799			Gruchala et al.
8,230,	061 B2	7/2012	Hassan et al.	8,364,089			Phillips
	433 B2	7/2012		8,364,806 8,369,274		2/2013	Short et al.
8,233, 8,233	883 B2 895 B2		De Froment Tysowski	8,370,477			Short et al.
	287 B1		Gopi et al.	8,370,483			Choong et al.
	520 B2	8/2012		8,374,090			Morrill et al.
	959 B2		Mia et al.	8,374,592 8,375,128			Proctor, Jr. et al. Tofighbakhsh et al.
	241 B2 601 B2		Montemurro Emberson et al.	8,375,126			Roman et al.
	880 B2		Aaltonen et al.	8,379,847	B2		Bell et al.
8,254,	915 B2		Kozisek	8,380,247			Engstrom
	515 B1		Melman et al.	8,385,199 8,385,896			Coward et al. Proctor, Jr. et al.
	534 B2 689 B2		Assadzadeh Kim et al.	8,385,964		2/2013	
	692 B2	9/2012		8,385,975	B2	2/2013	Forutanpour
8,264,	965 B2	9/2012	Dolganow et al.	8,386,386		2/2013	
	004 B2		Toutonghi	8,391,262 8,391,834			Maki et al. Raleigh
	681 B2 955 B2		Deshpande et al. Ramer et al.	8,396,458			Raleigh
	933 B2 972 B2		Otting et al.	8,396,929			Helfman et al.
	025 B2		Brisebois et al.	8,402,165			Deu-Ngoc et al.
	045 B2		Parolkar et al.	8,402,540 8,406,427			Kapoor et al. Chand et al.
	049 B2 992 B2		Silver et al. Chatley et al.	8,406,736			Das et al.
	415 B2	9/2012		8,407,472			Hao H04L 9/0827
	830 B2	9/2012	Raleigh				455/456.1
	067 B2		Berger et al.	8,407,763			Weller et al.
	864 B2	10/2012	Wood Ahmed et al.	8,411,587 8,411,691			Curtis et al. Aggarwal
	351 B1 354 B2		Smith et al.	8,412,798		4/2013	
	740 B2		O'Connor	8,418,168			Tyhurst et al.
8,285,	249 B2		Baker et al.	8,422,988 8,423,016			Keshav Buckley et al.
	238 B2 439 B2		Ginter et al. Jethi et al.	8,429,403			Moret et al.
	404 B2		McDysan et al.	8,429,409			Wall et al.
8,300,	575 B2	10/2012	Willars	8,437,734			Ray et al.
	513 B1		Peng et al.	8,441,955			Wilkinson et al. Behzad et al.
	518 B1 067 B2	11/2012	Gailloux	8,442,015 8,447,324			Shuman et al.
	095 B2		Clark et al.	8,447,607	B2	5/2013	Weider et al.
0.045	198 B2	11/2012	Corneille et al.	8,447,980	B2		Godfrey et al.
	593 B2	11/2012	Gallant et al.	8,448,015 8,452,858			Gerhart Win et al
	594 B1 718 B2		Mauser et al. Caffrey et al.	8,461,958			Wu et al. Saenz et al.
	999 B2		Chatley et al.	8,463,232			Tuli et al.
8,320,	244 B2	11/2012	Muqattash et al.	8,468,337			Gaur et al.
	902 B2		Moring et al.	8,472,371 8,477,778			Bari et al. Lehmann, Jr. et al.
	949 B2 638 B2	11/2012 12/2012	Matta lin et al	8,483,135			Cai et al.
	906 B2	12/2012	Fullarton et al.	8,483,694	B2		Lewis et al.
	319 B2	12/2012		8,484,327			Werner et al.
	359 B2		Kauffman	8,484,568 8,488,597			Rados et al. Nie et al.
	828 B2 223 B2		Zhou et al. Hill et al.	8,489,110			Frank et al.
	293 B2	12/2012		8,489,720	B1	7/2013	Morford et al.
8,332,	375 B2	12/2012	Chatley et al.	8,494,559		7/2013	
	517 B2	12/2012		8,495,181 8,495,227			Venkatraman et al. Kaminsky et al.
	161 B2 991 B2		Foottit et al. Biswas et al.	8,495,360	B2		Falk et al.
	628 B2		Taylor et al.	8,495,700			Shahbazi
8,340,	678 B1	12/2012	Pandey	RE44,412	E	8/2013	Naqvi et al.
	718 B2		Colonna et al.	8,503,358			Hanson et al.
	210 B2		Balsan et al.	8,503,455			Heikens
	104 B2 362 B2		Pathiyal Cai et al.	8,504,032 8,504,687			Lott et al. Maffione et al.
	378 B2		Merkin et al.	8,504,690			Shah et al.
	700 B2		Fast et al.	8,504,729			Pezzutti

(56)			Referen	ces Cited	8,719,423 B2	5/2014	
				DOCED CENTER	8,725,899 B2		Short et al.
	Ų	U.S. I	PALENT	DOCUMENTS	8,730,842 B2 8,731,519 B2		Collins et al. Flynn et al.
	0.505.072	Da	0/2012	T1'4'-4-1	8,732,808 B2		Sewall et al.
	8,505,073 8,509,082			Taglienti et al.	8,739,035 B2		Trethewey
				Heinz et al.	8,739,287 B1		Polyakov et al.
	8,514,927 8,516,552			Sundararajan et al. Raleigh	8,744,339 B2		Halfmann et al.
	8,520,589	B2		Bhatt et al.	8,761,711 B2	6/2014	Grignani et al.
	8,520,595	B2		Yadav et al.	8,780,857 B2	7/2014	Balasubramanian et al.
	8,521,110			Rofougaran	8,787,249 B2		Giaretta et al.
	8,521,775			Poh et al.	8,793,304 B2		Lu et al.
	8,522,039		8/2013	Hyndman et al.	8,799,227 B2		Ferguson et al.
	8,522,249	B2	8/2013	Beaule	8,804,517 B2		Oerton
	8,522,337			Adusumilli et al.	8,811,338 B2		Jin et al.
	8,523,547		9/2013		8,811,991 B2		Jain et al.
	8,526,329			Mahany et al.	8,812,525 B1 8,819,253 B2		Taylor, III Simeloff et al.
	8,527,410			Markki et al.	8,815,233 B2 8,825,109 B2		Montemurro et al.
	8,527,662			Biswas et al.	8,831,561 B2		Sutaria et al.
	8,528,068			Weglein et al. McNaughton et al.	8,837,322 B2		Venkataramanan et al.
	8,531,954 8,532,610			Manning Cassett et al.	8,838,686 B2		Getchius
	8,533,775			Alcorn et al.	8,838,752 B2		Lor et al.
	8,538,394			Zimmerman et al.	8,855,620 B2		Sievers et al.
	8,538,402			Vidal et al.	8,862,751 B2		Faccin et al.
	8,538,421			Brisebois et al.	8,863,111 B2		Selitser et al.
	8,538,458		9/2013	Haney	8,868,725 B2	10/2014	
	8,539,544	B2	9/2013	Garimella et al.	8,875,042 B2		LeJeune et al.
	8,539,561			Gupta et al.	8,880,047 B2		Konicek et al.
	8,543,265		9/2013	Ekhaguere et al.	8,898,748 B2 8,908,516 B2		Burks et al. Tzamaloukas et al.
	8,543,814	B2 *	9/2013	Laitinen H04L 9/0838	8,930,238 B2		Coffman et al.
			0.0000	713/155	8,943,551 B2 *		Ganapathy H04W 12/06
	8,544,105			Mclean et al.	0,5 15,551 B2	1/2015	713/155
	8,548,427 8,548,428		10/2013	Chow et al.	8,948,726 B2	2/2015	Smith et al.
	8,554,876		10/2013		8,949,597 B1		Reeves et al.
	8,565,746			Hoffman	8,966,018 B2	2/2015	Bugwadia et al.
	8,566,236		10/2013		8,971,841 B2		Menezes et al.
	8,571,474	B2		Chavez et al.	8,971,912 B2		Chou et al.
	8,571,501			Miller et al.	8,972,537 B2		Bastian et al.
	8,571,598		10/2013		8,977,284 B2	3/2015	
	8,571,993	B2	10/2013	Kocher et al.	8,977,856 B2*	3/2015	Malek H04W 12/04
	8,572,117			Rappaport	0.002.000 D1	2/2015	713/171
	8,572,256		10/2013		8,983,860 B1		Beda, III et al. Baker et al.
	8,583,499			De Judicibus et al.	8,995,952 B1 9,002,322 B2		Cotterill
	8,589,541 8,589,955			Raleigh et al. Roundtree et al.	9,002,342 B2		Tenhunen et al.
	8,600,895		12/2013		9,014,973 B2		Ruckart
	8,601,125	B2		Huang et al.	9,021,069 B2		Ducrou et al.
	8,605,691	B2		Soomro et al.	9,030,934 B2	5/2015	Shah et al.
	8,621,056			Coussemaeker et al.	9,032,427 B2	5/2015	Gallant et al.
	8,626,115			Raleigh et al.	9,043,462 B2		Badiee et al.
	8,630,314	B2	1/2014		9,047,651 B2		Roumeliotis et al.
	8,631,428			Scott et al.	9,049,010 B2		Jueneman et al.
	8,634,425			Gorti et al.	9,111,088 B2		Ghai et al.
	8,635,164			Rosenhaft et al.	9,135,037 B1 9,137,389 B2		Petrescu-Prahova et al. Neal et al.
	8,639,215	BZ D1		McGregor et al.	9,137,389 B2 9,172,553 B2		Dawes et al.
	8,644,702 8,644,813			Kalajan Gailloux et al.	9,173,090 B2		Tuchman et al.
	8,645,518		2/2014		9,176,913 B2		Millet et al.
	8,655,357			Gazzard et al.	9,177,455 B2	11/2015	Remer
	8,660,853			Robb et al.	9,191,394 B2*	11/2015	Novak H04L 63/102
	8,666,395		3/2014		9,282,460 B2	3/2016	Souissi
	8,667,542			Bertz et al.	9,298,723 B1		Vincent
	8,670,334	B2	3/2014	Keohane et al.	9,325,737 B2		Gutowski et al.
	8,670,752			Fan et al.	9,326,173 B2	4/2016	
	8,675,852		3/2014		9,344,557 B2		Gruchala et al.
	8,676,925			Liu et al.	9,361,451 B2 *		Oberheide G06F 21/34
	8,693,323			McDysan	9,367,680 B2 9,369,959 B2		Mahaffey et al. Ruutu et al.
	8,694,772			Kao et al.	9,386,045 B2*		Kgil H04L 63/205
	8,700,729	DZ °	4/2014	Dua G06Q 20/20	9,386,043 B2 * 9,392,462 B2 *	7/2016	Raleigh H04U 12/08
	0.701.015	Da	4/2014	705/64	9,392,402 B2 * 9,413,546 B2 *		Meier H04L 12/24
	8,701,015 8,705,361			Bonnat Venkataraman et al	2002/0120370 A1		Parupudi et al.
	8,705,361		4/2014	Venkataraman et al.	2002/0120370 A1 2002/0138599 A1		Dilman et al.
	8,712,631			Tietjen et al.	2002/0154751 A1		Thompson et al.
	8,713,535			Malhotra et al.	2002/0134731 A1 2002/0188732 A1		Buckman et al.
	8,713,641			Pagan et al.	2002/0191573 A1		Whitehill et al.
	8,719,397			Levi et al.	2003/0028623 A1		Hennessey et al.
	-,,1,001		J. 2017	27.1 % 61.	2005.0020025 711	2,2003	

(56)	Re	feren	ces Cited	2008/0032715 2008/0034063		2/2008 2/2008	Jia et al. Yee
	U.S. PAT	ENT	DOCUMENTS	2008/0034003			Mullick et al.
				2008/0050715 2008/0056273			Golczewski et al. Pelletier et al.
2003/0084321 2003/0134650		2003 2003	Tarquini et al. Sundar et al.	2008/0036273			Haveson et al.
2003/0159030			Evans	2008/0080457	A1	4/2008	Cole
2003/0184793	3 A1 10/		Pineau	2008/0089303			Wirtanen et al.
2003/0188006 2004/0039792			Bard Nakanishi	2008/0096559 2008/0125079			Phillips et al. O'Neil et al.
2004/0039792		2004		2008/0126287			Cox et al.
2004/0127208	3 A1 7/.	2004	Nair et al.	2008/0139210			Gisby et al.
2004/0133668 2004/0137890			Nicholas, III Kalke	2008/0166993 2008/0168275			Gautier et al. DeAtley et al.
2004/0137890			Guo et al.	2008/0178300			Brown et al.
2004/0176104	4 A1 9/.	2004	Arcens	2008/0212751		9/2008	
2004/0203833		2004	Rathunde et al.	2008/0263348 2008/0270212			Zaltsman et al. Blight et al.
2004/0225561 2004/0243680		2004	Hertzberg et al. Mayer	2008/0279216		11/2008	
2004/0243992		2004	Gustafson et al.	2008/0282319			Fontijn et al.
2004/0259534		2004	Chaudhari et al.	2008/0293395 2008/0313315		11/2008 12/2008	Mathews et al. Karaoguz et al.
2004/0260766 2004/0267872		2004	Barros et al. Serdy et al.	2008/0320497		12/2008	
2005/0041617	7 A1 2/		Huotari et al.	2009/0006229		1/2009	
2005/0060525			Schwartz et al.	2009/0016310 2009/0036111		1/2009	Danford et al.
2005/0075115 2005/0091505			Corneille et al. Rilev et al.	2009/0042536			Bernard et al.
2005/0096024			Bicker et al.	2009/0044185		2/2009	1
2005/0108075			Douglis et al.	2009/0046707 2009/0047989		2/2009	Smires et al. Harmon et al.
2005/0135264 2005/0163320			Popoff et al. Brown et al.	2009/0048913		2/2009	Shenfield et al.
2005/0186948			Gallagher et al.	2009/0049156		2/2009	Aronsson et al.
2005/0239447			Holzman et al.	2009/0049518 2009/0065571		2/2009 3/2009	Roman et al. Jain
2005/0245241 2005/0250536			Durand et al. Deng et al.	2009/0070379			Rappaport
2006/0030306			Kuhn	2009/0132860		5/2009	Liu et al.
2006/0035631			White et al.	2009/0163173 2009/0181662		6/2009	Williams Fleischman et al.
2006/0072451 2006/0075506		2006 2006	Ross Sanda et al.	2009/0197612			Kiiskinen
2006/0095517			O'Connor et al.	2009/0203352			Fordon et al.
2006/0098627			Karaoguz et al.	2009/0217364 2009/0254857		8/2009	Salmela et al. Romine et al.
2006/0099970 2006/0114821			Morgan et al. Willey et al.	2009/0234837			LeBlanc et al.
2006/0126562		2006		2009/0307696		12/2009	
2006/0136882			Noonan et al.	2009/0320110 2010/0030890		12/2009	Nicolson et al. Dutta et al.
2006/0143066 2006/0160536		2006 2006	Calabria Chou	2010/0041365			Lott et al.
2006/0168128			Sistla et al.	2010/0075666		3/2010	
2006/0182137			Zhou et al.	2010/0121744 2010/0151866			Belz et al. Karpov et al.
2006/0200663 2006/0206709		2006 2006	Thornton Labrou et al.	2010/0151600		7/2010	Smith et al.
2006/0277590			Limont et al.	2010/0188975			Raleigh
2006/0291419			McConnell et al.	2010/0188990 2010/0188991			Raleigh Raleigh
2007/0005795 2007/0060200			Gonzalez Boris et al.	2010/0188992			Raleigh
2007/0061800			Cheng et al.	2010/0188993			Raleigh
2007/0073899		2007		2010/0188994 2010/0188995			Raleigh Raleigh
2007/0130283 2007/0143824			Klein et al. Shahbazi	2010/0190469			Vanderveen et al.
2007/0147317		2007		2010/0190470			Raleigh
2007/0165630			Rasanen et al.	2010/0191575 2010/0191576			Raleigh Raleigh
2007/0174490 2007/0192460			Choi et al. Choi et al.	2010/0191604			Raleigh
2007/0201502	2 A1 8/	2007	Abramson	2010/0191612			Raleigh
2007/0213054		2007		2010/0191613 2010/0191846			Raleigh Raleigh
2007/0226775 2007/0234402			Andreasen et al. Khosravi et al.	2010/0191847			Raleigh
2007/0255769	A 1 11/.	2007	Agrawal et al.	2010/0192120			Raleigh
2007/0255797			Dunn et al.	2010/0192170 2010/0192207			Raleigh Raleigh
2007/0257767 2007/0259656		2007 2007	Beeson Jeong	2010/0192212			Raleigh
2007/0266422	2 A1 11/	2007	Germano et al.	2010/0195503	A1	8/2010	Raleigh
2007/0293191			Mir et al.	2010/0197266			Raleigh
2007/0294410 2007/0297378			Pandya et al. Poyhonen et al.	2010/0197267 2010/0197268			Raleigh Raleigh
2007/0297378			Nieh et al.	2010/0197208			Raleigh
2008/0010379	A 1 1/.	2008	Zhao	2010/0198939	A1	8/2010	Raleigh
2008/0018494			Waite et al.	2010/0199325			Raleigh
2008/0025230) A1 1/.	∠∪∪8	Patel et al.	2010/0235329	AI	9/2010	Koren et al.

Document 65-1 #: 766

(56)	Referer	nces Cited	JP JP	2006041989 2006155263 A	2/2006 6/2006
U.S. 1	PATENT	DOCUMENTS	JР	2006197137	7/2006
			JP JP	2006344007 A 2007318354 A	12/2006
2010/0248719 A1 2010/0287599 A1		Scholaert He et al.	JP JP	2007318334 A 2008301121 A	12/2007 12/2008
2010/0311402 A1	12/2010	Srinivasan et al.	JP	2009111919	5/2009
2010/0318652 A1 2011/0110309 A1	12/2010	Samba Bennett	JP JP	2009212707 A 2009218773	9/2009 9/2009
2011/0110309 A1 2011/0145920 A1	6/2011	Mahaffey et al.	JP	2009232107 A	10/2009
2011/0238545 A1 2011/0277019 A1		Fanaian et al. Pritchard, Jr.	WO WO	9858505 9927723 A1	12/1998 6/1999
2011/02/7019 A1 2011/0314145 A1		Raleigh	WO	9965185	12/1999
2011/0320588 A1 2012/0084184 A1		Raleigh Raleigh	WO WO	0245315 A2 02067616 A1	
2012/0084184 A1 2012/0084438 A1		Raleigh	WO	02093877 A1	11/2002
2012/0087319 A1 2012/0089727 A1		Raleigh Raleigh	WO WO	03014891 03017063 A2	2/2003 2/2003
2012/0089727 A1 2012/0101952 A1		Raleigh	WO	03017065 A2	2/2003
2012/0108225 A1		Luna et al.	WO WO	03058880 2004028070	7/2003 4/2004
2012/0144025 A1 2012/0166364 A1		Melander et al. Ahmad et al.	WO	2004064306 A2	7/2004
2012/0166604 A1		Fortier et al.	WO WO	2004077797 2004095753	9/2004 11/2004
2012/0167162 A1 2012/0215911 A1		Raleigh Raleigh	WO	2005008995	1/2005
2012/0221955 A1		Raleigh	WO WO	2005083934 A1 2006004467	9/2005 1/2006
2012/0278722 A1 2013/0065551 A1		Raleigh Raleigh	WO	2006004784 A1	
2013/0072177 A1	3/2013	Ross et al.	WO WO	2006012610 A2 2006050758	2/2006 5/2006
2013/0132854 A1 2013/0196647 A1		Raleigh Raleigh	WO	2006073837	7/2006
2013/0275583 A1	10/2013	Roach et al.	WO WO	2006077481 2006093961 A1	7/2006 9/2006
2013/0304616 A1 2013/0326356 A9		Raleigh Zheng et al.	WO	2006093961 AT 2006120558	11/2006
2014/0040975 A1	2/2014	Raleigh	WO WO	2006130960 2007001833	1/2006
2014/0059640 A9 2014/0066101 A1		Raleigh Lyman et al.	WO	2007001833	1/2007 2/2007
2014/0073291 A1	3/2014	Hildner et al.	WO	2007018363	2/2007
2014/0075567 A1 2014/0080458 A1		Raleigh Bonner et al.	WO WO	2007053848 2007068288 A1	5/2007 6/2007
2014/0098671 A1		Raleigh	WO	2007069245	6/2007
2014/0241342 A1 2015/0149358 A1		Constantinof Robbin et al.	WO WO	2007097786 2007107701	8/2007 9/2007
2013/0149338 A1	3/2013	Robbin et al.	WO	2007120310	10/2007
FOREIG	N PATE	ENT DOCUMENTS	WO WO	2007124279 2007126352	11/2007 11/2007
CN 1345	5154 A	4/2002	WO	2007133844 A	11/2007
CN 1508	3734 A	6/2004	WO WO	2008017837 2008051379	2/2008 5/2008
	8730 A 7818 A	10/2004 1/2005	WO	2008066419	6/2008
	308 A	3/2006	WO WO	2008080139 2008080430	7/2008 7/2008
	1829 A 2839 A	7/2006 7/2006	WO	2008099802	8/2008
	777 A	7/2006	WO WO	2009008817 A1 2009091295 A1	1/2009 7/2009
	5343 A 7024 A	9/2006 11/2006	WO	2010088413	8/2010
	3160 A	12/2006	WO WO	2011002450 A1 2011149532 A1	1/2011 12/2011
	7511 A 8553 A	3/2007 9/2007	WO	2012047275 A	4/2012
	0055 A	11/2007			
	5248 A 7988 A	1/2008 2/2008		OTHER PU	JBLICATIONS
	900 A 8958 A	5/2008	"The Const	truction of Intelligent	Residential District in Use of Cabl
	666 A	12/2008			Science, vol. 13, No. 2, Jun. 2000
	1764 A 5275 A	1/2009 8/2010			Mobile Agent Systems," by Joachin l and Distributed High-Performanc
	0326 A1	3/2003	Systems, U	Iniv. of Stuttgart, Go	ermany, pp. 123-135, 1997.
EP 1463 EP 1503	3548 A1	9/2004 2/2005	"Prevent io	Cloud Documents &)11: CNET websich	Data from using your data plan, ive, by Jason Cipriani.
EP 1545	5114 A1	6/2005	"3rd Gener	ation Partnership Pro	oject; Technical Specification Group
EP 1739 EP 1772		1/2007 4/2007			Policy and charging control archi
EP 1850)575 A1	10/2007		tipolis, France; pp. 1	tandard; 3GPP TS 23.203 v11.6.0177; Jun. 2012.
EP 1887 EP 1978	7732 A1 8772	2/2008 10/2008	"End to En	d QoS Solution for I	Real-time Multimedia Application;
EP 2007	7065 A1	12/2008			oplications, 2007, 43 (4): 155-159 n-juan; Information and Science
	5831 A1 3713 B2	6/2012 3/2001			ge, Zhan jiang, Guangdong 524048
JP 2005339	9247 A	12/2005	China.		

Page 10

(56)References Cited

OTHER PUBLICATIONS

"ASA/PIX: Allow Split Tunneling for VPN Clients on the ASA Configuration Example," Document ID 70917, Jan. 10, 2008. U.S. Appl. No. 61/206,354, filed Jan. 28, 2009, Raleigh. U.S. Appl. No. 61/206,944, filed Feb. 4, 2009, Raleigh. U.S. Appl. No. 61/207,393, filed Feb. 10, 2009, Raleigh. U.S. Appl. No. 61/207,739, filed Feb. 13, 2009, Raleigh. U.S. Appl. No. 61/270,353, filed Jul. 6, 2009, Raleigh. U.S. Appl. No. 61/275,208, filed Aug. 25, 2009, Raleigh. U.S. Appl. No. 61/237,753, filed Aug. 28, 2009, Raleigh. U.S. Appl. No. 61/252,151, filed Oct. 15, 2009, Raleigh. U.S. Appl. No. 61/252,153, filed Oct. 15, 2009, Raleigh. U.S. Appl. No. 61/264,120, filed Nov. 24, 2009, Raleigh. U.S. Appl. No. 61/264,126, filed Nov. 24, 2009, Raleigh. U.S. Appl. No. 61/348,022, filed May 25, 2010, Raleigh. U.S. Appl. No. 61/381,159, filed Sep. 9, 2010, Raleigh. U.S. Appl. No. 61/381,162, filed Sep. 9, 2010, Raleigh. U.S. Appl. No. 61/384,456, filed Sep. 20, 2010, Raleigh. U.S. Appl. No. 61/389,547, filed Oct. 4, 2010, Raleigh. U.S. Appl. No. 61/385,020, filed Sep. 21, 2010, Raleigh. U.S. Appl. No. 61/387,243, filed Sep. 28, 2010, Raleigh. U.S. Appl. No. 61/387,247, filed Sep. 28, 2010, Raleigh. U.S. Appl. No. 61/407,358, filed Oct. 27, 2010, Raleigh. U.S. Appl. No. 61/418,507, filed Dec. 1, 2010, Raleigh. U.S. Appl. No. 61/418,509, filed Dec. 1, 2010, Raleigh. U.S. Appl. No. 61/420,727, filed Dec. 7, 2010, Raleigh. U.S. Appl. No. 61/422,565, filed Dec. 13, 2010, Raleigh. U.S. Appl. No. 61/422,572, filed Dec. 13, 2010, Raleigh. U.S. Appl. No. 61/422,574, filed Dec. 13, 2010, Raleigh. U.S. Appl. No. 61/435,564, filed Jan. 24, 2011, Raleigh. U.S. Appl. No. 61/472,606, filed Apr. 6, 2011, Raleigh. U.S. Appl. No. 61/550,906, filed Oct. 24, 2011, Raleigh. U.S. Appl. No. 61/589,830, filed Jan. 23, 2012, Raleigh. U.S. Appl. No. 61/610,876, filed Mar. 14, 2012, Raleigh. U.S. Appl. No. 61/610,910, filed Mar. 14, 2012, Raleigh. U.S. Appl. No. 61/658,339, filed Jun. 11, 2012, Raleigh. U.S. Appl. No. 61/667,927, filed Jul. 3, 2012, Raleigh. U.S. Appl. No. 61/674,331, filed Jul. 21, 2012, Raleigh. U.S. Appl. No. 61/724,267, filed Nov. 8, 2012, Raleigh. U.S. Appl. No. 61/724,837, filed Nov. 9, 2012, Raleigh. U.S. Appl. No. 61/724,974, filed Nov. 10, 2012, Raleigh U.S. Appl. No. 61/732,249, filed Nov. 30, 2012, Raleigh. U.S. Appl. No. 61/734,288, filed Dec. 6, 2012, Raleigh. U.S. Appl. No. 61/745,548, filed Dec. 22, 2012, Raleigh. U.S. Appl. No. 61/756,332, filed Jan. 24, 2013, Raleigh. U.S. Appl. No. 61/758,694, filed Jan. 30, 2013, Raleigh. U.S. Appl. No. 61/765,978, filed Feb. 18, 2013, Raleigh.

3rd Generation Partnership Project, "Technical Specification Group Core Network and Terminals; Access Network Discovery and Selection Function (ANDSF) Management Object (MO)," Release 9, Document No. 3GPP TS 24.312, V9.1.0, Mar. 2010.

3rd Generation Partnership Project; "Technical Specification Group Services and System Aspects; IP Flow Mobility and seamless WLAN offload; Stage 2," Release 10, Document No. 3GPP TS 23.261, V1.0.0, Mar. 2010.

Ahmed et al., "Multi Access Data Network Connectivity and IP Flow Mobility in Evolved Packet System (EPS)," 2010 IEEE. Blackberry Mobile Data System, version 4.1, Technical Overview,

Client Guide for Symantec Endpoint Protection and Symantec Network Access Control, 2007.

Ehnert, "Small application to monitor IP trafic on a Blackberry— 1.01.03", Mar. 27, 2008; http://www.ehnert.net/MiniMoni/.

Fujitsu, "Server Push Technology Survey and Bidirectional Communication in HTTP Browser," Jan. 9, 2008 (JP).

Kasper et al., "Subscriber Authentication in mobile cellular Networks with virtual software SIM Credentials using Trusted Computing," Fraunhofer-Institute for Secure Information Technology SIT, Darmstadt, Germany; ICACT 2008.

Kuntze et al., "Trustworthy content push," Fraunhofer-Institute for Secure Information Technology SIT; Germany; WCNC 2007 proceedings, IEEE.

Muntermann et al., "Potentiale und Sicherheitsanforderungen Finanzinformationsdienste mobiler und Systeminfrastrukturen," Chair of Mobile Commerce & Multilateral Security, Goethe Univ. Frankfurt, 2004.

NetLimiter Lite 4.0.19.0; http://www.heise.de/download/netlimiterlite-3617703.html from vol. 14/2007.

Open Mobile Alliance (OMA), Push Architecture, Candidate Version 2.2; Oct. 2, 2007; OMA-AD-Push-V2_2-20071002-C.

Quintana, David, "Mobile Multitasking," Apr. 14, 2010.

Roy et al., "Energy Management in Mobile Devices with the Cinder Operating System", Stanford University, MIT CSAIL, Jun. 3, 2010. Windows7 Power Management, published Apr. 2009.

Ahmed et al., "A Context-Aware Vertical Handover Decision Algorithm for Multimode Mobile Terminals and Its Performance," BenQ Mobile, Munich Germany; University of Klagenfurt, Klagenfurt, Austria; 2006.

Dixon et al., Triple Play Digital Services: Comcast and Verizon (Digital Phone, Television, and Internet), Aug. 2007.

Kassar et al., "An overview of vertical handover decision strategies in heterogeneous wireless networks," ScienceDirect, University Pierre & Marie Curie, Paris, France, Jun. 5, 2007.

Sadeh et al., "Understanding and Capturing People's Privacy Policies in a Mobile Social Networking Application," ISR School of Computer Science, Carnegie Mellon University, 2007.

Schiller et al., "Location-Based Services," The Morgan Kaufmann Series in Data Management Systems, 2004.

"Ads and movies on the run," the Gold Coast Bulletin, Southport, Qld, Jan. 29, 2008.

"Jentro Technologies launches Zenlet platform to accelerate location-based content delivery to mobile devices," The Mobile Internet, Boston, MA, Feb. 2008.

Jing et al., "Client-Server Computing in Mobile Environments," GTE Labs. Inc., Purdue University, ACM Computing Surveys, vol. 31, No. 2, Jun. 1999

Kim, "Free wireless a high-wire act; MetroFi needs to draw enough ads to make service add profits," San Francisco Chronicle, Aug. 21,

Koutsopoulou et al., "Charging, Accounting and Billing Management Schemes in Mobile Telecommunication Networks and the Internet," IEEE Communications Surveys & Tutorials, First Quarter 2004, vol. 6, No. 1.

Loopt User Guide, metroPCS, Jul. 17, 2008.

Nuzman et al., "A compund model for TCP connection arrivals for LAN and WAN applications," Oct. 22, 2002.

Richtel, "Cellphone consumerism; If even a debit card is too slow, now you have a new way to act on impulse: [National Edition]," National Post, Canada, Oct. 2, 2007.

Rivadeneyra et al., "A communication architecture to access data services through GSM," San Sebastian, Spain, 1998.

Sabat, "The evolving mobile wireless value chain and market structure," Nov. 2002

Sun et al., "Towards Connectivity Management Adaptability: Context Awareness in Policy Representation and End-to-end Evaluation Algorithm," Dept. of Electrical and Information Engineering, Univ. of Oulu, Finland, 2004.

3rd Generation Partnership Project, "Technical Specification Group Services and System Aspects; General Packet Radio Service (GPRS) Enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) Access," Release 8, Document No. 3GPP TS 23.401, V8.4.0, Dec. 2008.

3rd Generation Partnership Project, "Technical Specification Group Services and System Aspects; Policy and Charging Control Architecture," Release 8, Document No. 3GPP TS 23.203, V8.4.0, Dec.

Alonistioti et al., "Intelligent Architectures Enabling Flexible Service Provision and Adaptability," 2002.

Amazon Technologies, Inc., "Kindle™ User's Guide," 3rd Edition, Copyright 2004-2009.

Chandrasekhar et al., "Femtocell Networks: A Survey," Jun. 28,

#: 768

Document 65-1

Page 11

(56)References Cited

OTHER PUBLICATIONS

Chaouchi et al., "Policy Based Networking in the Integration Effort of 4G Networks and Services," 2004 IEEE.

Cisco Systems, Inc., "Cisco Mobile Exchange (CMX) Solution Guide: Chapter 2—Overview of GSM, GPRS, and UMTS," Nov. 4,

Dikaiakos et al., "A Distributed Middleware Infrastructure for Personalized Services," Nov. 24, 2003.

European Commission, "Data Roaming Tariffs-Transparency Measures," [online] retrieved from http://web.archive.org/web/ 20081220232754/http://ec.europa.eu/information society/activities/roaming/data/measures/index_en.htm, Dec. 20, 2008 [retrieved May 16, 2012].

Farooq et al., "An IEEE 802.16 WiMax Module for the NS-3 Simulator," Mar. 2-6, 2009.

Han et al., "Information Collection Services for Qos-Aware Mobile Applications," 2005.

Hartmann et al., "Agent-Based Banking Transactions & Information Retrieval—What About Performance Issues?" 1999.

Hewlett-Packard Development Company, LP, "IP Multimedia Ser-

vices Charging," white paper, Jan. 2006. Hossain et al., "Gain-Based Selection of Ambient Media Services in Pervasive Environments," Mobile Networks and Applications. Oct.

Knight et al., "Layer 2 and 3 Virtual Private Networks: Taxonomy, Technology, and Standarization Efforts," IEEE Communications Magazine, Jun. 2004.

Koutsopoulou et al., "Middleware Platform for the Support of Charging Reconfiguration Actions," 2005.

Kyriakakos et al., "Ubiquitous Service Provision in Next Generation Mobile Networks," Proceedings of the 13th IST Mobile and Wireless Communications Summit, Lyon, France, Jun. 2004.

Li, Yu, "Dedicated E-Reading Device: The State of the Art and the Challenges," Scroll, vol. 1, No. 1, 2008.

Nilsson et al., "A Novel MAC Scheme for Solving the QoS Parameter Adjustment Problem in IEEE802.11e EDCA," Feb. 2006. Oppliger, Rolf, "Internet Security: Firewalls and Bey," Communications of the ACM, May 1997, vol. 40. No. 5.

Rao et al., "Evolution of Mobile Location-Based Services," Communication of the ACM, Dec. 2003.

Steglich, Stephan, "I-Centric User Interaction," Nov. 21, 2003.

Van Eijk, et al., "GigaMobile, Agent Technology for Designing Personalized Mobile Service Brokerage," Jul. 1, 2002.

Zhu et al., "A Survey of Quality of Service in IEEE 802.11 Networks," IEEE Wireless Communications, Aug. 2004.

Anton, B. et al., "Best Current Practices for Wireless Internet Service Provider (WISP) Roaming"; Release Date Feb. 2003, Version 1.0; Wi-Fi Alliance—Wireless ISP Roaming (WISPr).

Ruckus Wireless-White Paper; "Smarter Wi-Fi for Mobile Operator Infrastructures" 2010.

Accuris Networks, "The Business Value of Mobile Data Offload-a White Paper", 2010.

Wireless Broadband Alliance, "WISPr 2.0, Apr. 8, 2010"; Doc. Ref. No. WBA/RM/WISPr, Version 01.00.

Thurston, Richard, "WISPr 2.0 Boosts Roaming Between 3G and Wi-Fi"; Jun. 23, 2010; Web page from zdnet.com; Zdnet.com/wispr-2-0-boosts-roaming-between-3g-and-wi-fi-3040089325/

Wi-Fi Alliance Technical Committee Hotspot 2.0 Technical Task Group, "Hotspot 2.0 (Release 1) Technical Specification—Version 1.0.0"; 2012.

Wi-Fi Alliance Hotspot 2.0 Technical Task Group, "Wi-Fi Certified Passpoint™ (Release 1) Deployment Guidelines—Version 1.0— Oct. 2012".

Search Report and Written Opinion mailed Jan. 6, 2015 from International Serial No. PCT/US2014/025353 filed Mar. 13, 2014.

^{*} cited by examiner


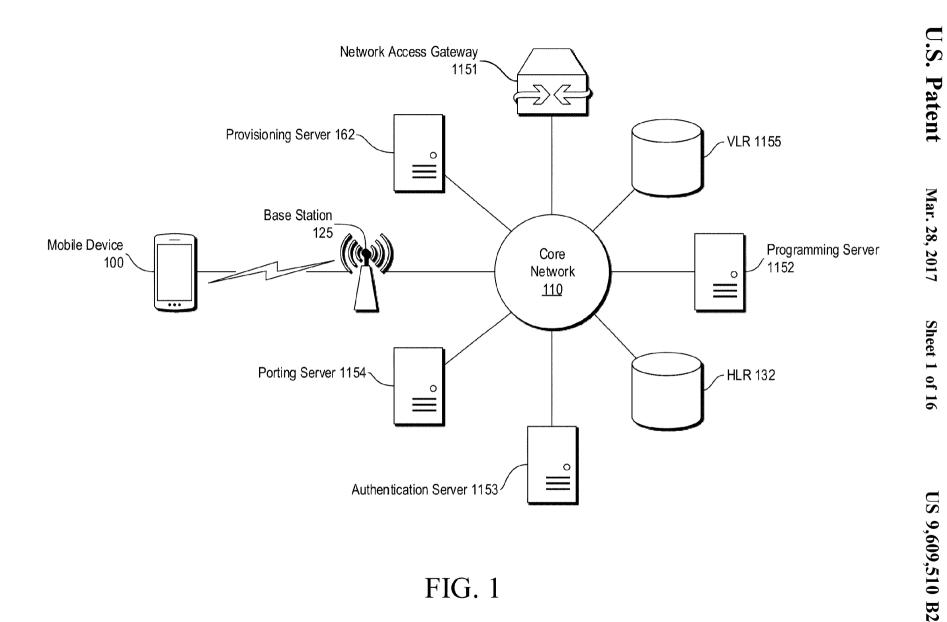


FIG. 1

U.S. Patent Mar. 28, 2017 Sheet 2 of 16 US 9,609,510 B2

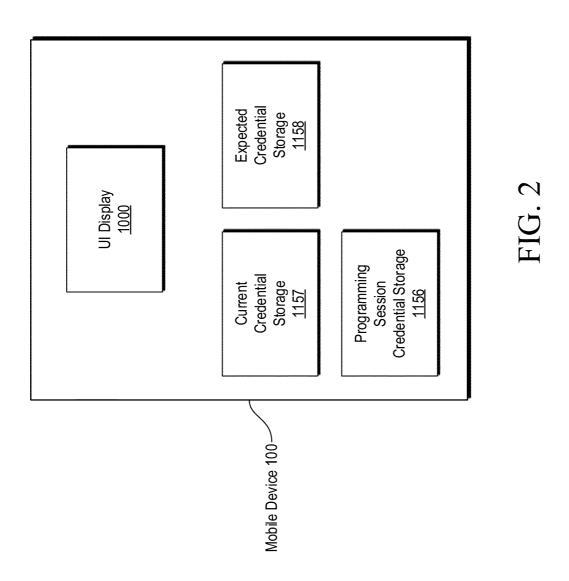


Patent

Mar. 28, 2017

Sheet 3 of 16

US 9,609,510 B2

FIG. 3

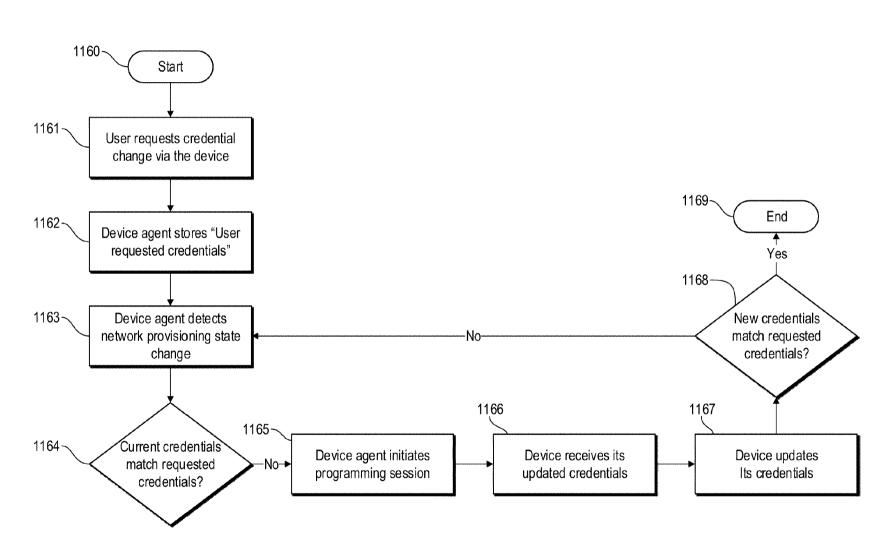

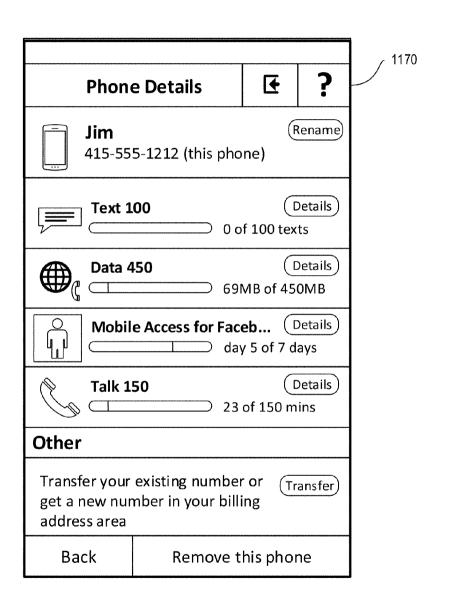


FIG. 4

1171

Phone Number

This device's current phone number:

415-555-1212

You may choose to keep this phone number or change it. If you choose to keep it now, it can always be changed anytime from a device with the Admin role.


Please select a phone number option:

- Keep my phone number
- Transfer my number from another phone
- Give me a new phone number in my account's area code

(Based on the zip code you entered in the account information section)

Continue



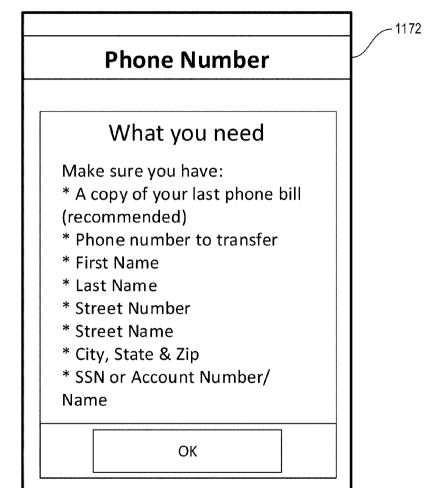


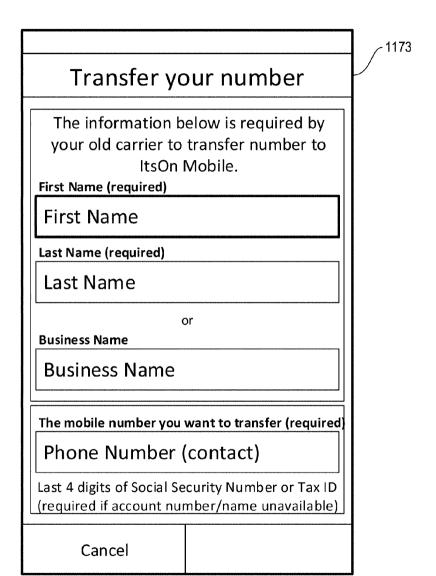


FIG. 7A

Document 65-1 #: 776

Transfer yo								
Street Number (required								
Street Name (required) Street Name City (required)								
City State (required)	Zip Code (require	d)						
State								
Your current carrier account information Account Number/name (without dashes) (required if no SSN/Tax ID #)								
Account #/name (no dashes) Cancel Continue								

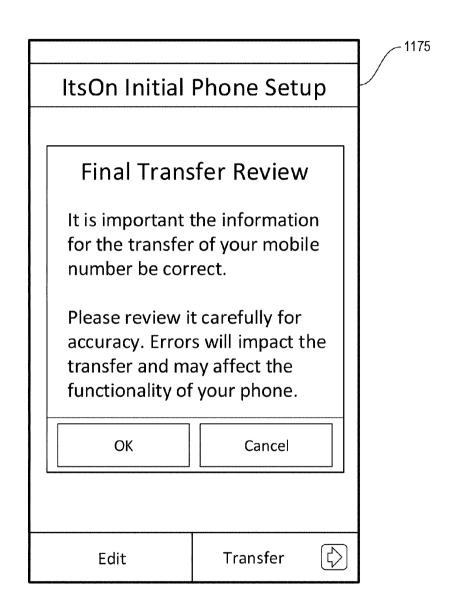


U.S. Patent

Mar. 28, 2017

Sheet 10 of 16

US 9,609,510 B2

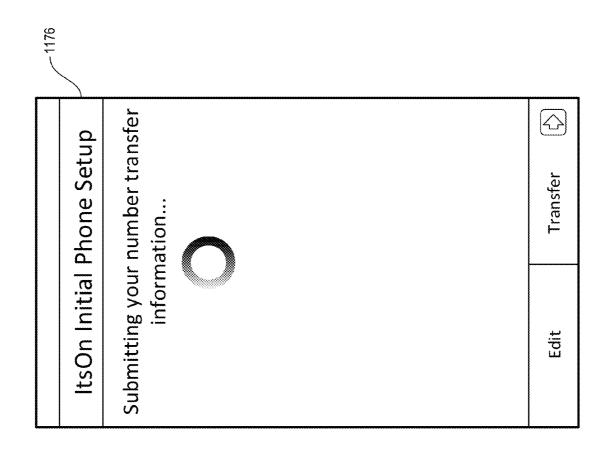

'IG. 9

1177



Your number transfer has been successfully requested!
Transferring number may take up to 4 hours to complete.

Continue

#: 780

1178

Number Transferred


Your phone number has been successfully transferred to your ItsOn Mobile device. In order to complete the transfer, your device will need to update itself with its new number.

During the update process, you will not be able to use your phone or make emergency calls.

Once you begin, your device will restart twice on its own, and you may see several other messages as it updates and activates.

Later

Restart Now

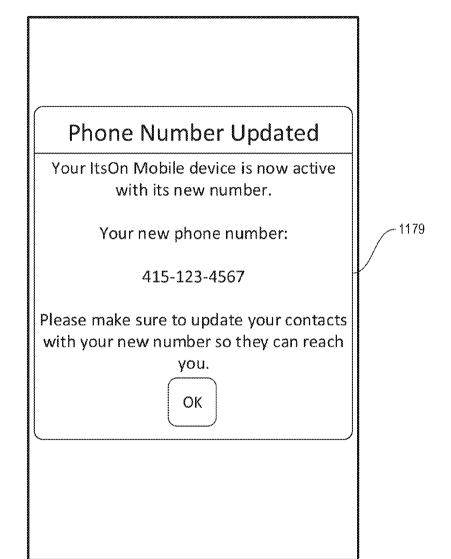

1180

ItsOn Initial Phone Setup

Just a minute...
We're checking to see if you requested to transfer your existing mobile number to this phone...



Skip this step

U.S. Patent Mar. 28, 2017 Sheet 15 of 16 US 9,609,510 B2

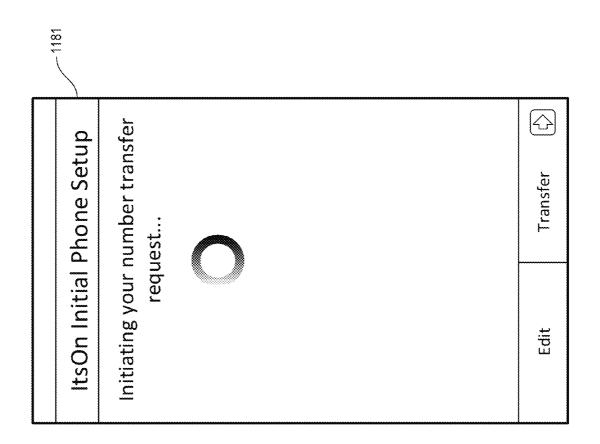


FIG. 14

Patent

Mar. 28, 2017

Sheet 16 of 16

US 9,609,510 B2

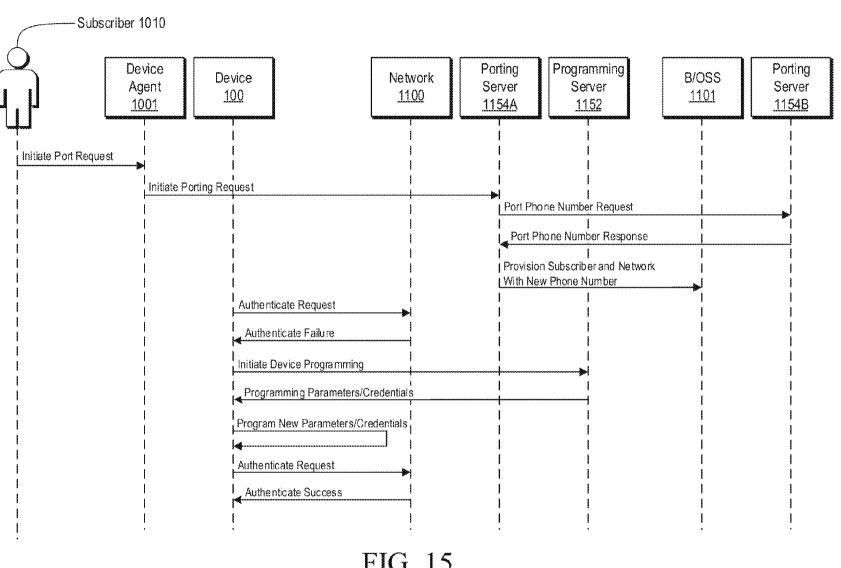


FIG. 15

#: 785

Document 65-1

1

AUTOMATED CREDENTIAL PORTING FOR MOBILE DEVICES

CROSS REFERENCE TO OTHER APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 61/785,988, filed Mar. 14, 2013, entitled AUTOMATED CREDENTIAL PORTING FOR MOBILE DEVICES, which is hereby incorporated by reference for all 10 purposes.

This document incorporates by reference for all purposes the following non-provisional U.S. patent applications: U.S. application Ser. No. 12/380,780, filed Mar. 2, 2009, entitled AUTOMATED DEVICE PROVISIONING AND ACTIVA- 15 TION; U.S. application Ser. No. 12/695,019, filed Jan. 27, 2010, entitled DEVICE ASSISTED CDR CREATION, AGGREGATION, MEDIATION AND BILLING, now U.S. Pat. No. 8,275,830 (issued Sep. 25, 2012); U.S. application Ser. No. 12/695.020, filed Jan. 27, 2010, entitled ADAP- 20 TIVE AMBIENT SERVICES; U.S. application Ser. No. 12/694,445, filed Jan. 27, 2010, entitled SECURITY TECH-NIQUES FOR DEVICE ASSISTED SERVICES, now U.S. Pat. No. 8,391,834 (issued Mar. 5, 2013); U.S. application Ser. No. 12/694,451, filed Jan. 27, 2010, entitled DEVICE 25 GROUP PARTITIONS AND SETTLEMENT PLATFORM; U.S. application Ser. No. 12/694,455, filed Jan. 27, 2010, entitled DEVICE ASSISTED SERVICES INSTALL; U.S. application Ser. No. 12/695,021, filed Jan. 27, 2010, entitled QUALITY OF SERVICE FOR DEVICE ASSISTED SER- 30 VICES, now U.S. Pat. No. 8,346,225 (issued Jan. 1, 2013); U.S. application Ser. No. 12/695,980, filed Jan. 28, 2010, entitled ENHANCED ROAMING SERVICES AND CON-VERGED CARRIER NETWORKS WITH DEVICE ASSISTED SERVICES AND A PROXY, now U.S. Pat. No. 35 8,340,634 (issued Dec. 25, 2012); U.S. application Ser. No. 13/134,028, filed May 25, 2011, entitled DEVICE-AS-SISTED SERVICES FOR PROTECTING NETWORK CAPACITY; U.S. application Ser. No. 13/229,580, filed Sep. 9, 2011, entitled WIRELESS NETWORK SERVICE 40 U.S. Provisional Application No. 61/264,126, filed Nov. 24, INTERFACES; U.S. application Ser. No. 13/237,827, filed Sep. 20, 2011, entitled ADAPTING NETWORK POLICIES BASED ON DEVICE SERVICE PROCESSOR CONFIGU-RATION; U.S. application Ser. No. 13/253,013, filed Oct. 4, 2011, entitled SYSTEM AND METHOD FOR PROVID- 45 ING USER NOTIFICATIONS; U.S. application Ser. No. 13/239,321, filed Sep. 21, 2011, entitled SERVICE OFFER SET PUBLISHING TO DEVICE AGENT WITH ON-DE-VICE SERVICE SELECTION; U.S. application Ser. No. 13/248,028, filed Sep. 28, 2011, entitled ENTERPRISE 50 ACCESS CONTROL AND ACCOUNTING ALLOCA-TION FOR ACCESS NETWORKS; U.S. application Ser. No. 13/247,998, filed Sep. 28, 2011, entitled SECURE DEVICE DATA RECORDS; U.S. application Ser. No. 13/309,556, filed Dec. 1, 2011, entitled END USER 55 DEVICE THAT SECURES AN ASSOCIATION OF APPLI-CATION TO SERVICE POLICY WITH AN APPLICA-TION CERTIFICATE CHECK; U.S. application Ser. No. 13/309,463, filed Dec. 1, 2011, entitled SECURITY, FRAUD DETECTION, AND FRAUD MITIGATION IN 60 DEVICE-ASSISTED SERVICES SYSTEMS; U.S. application Ser. No. 13/248,025, filed Sep. 28, 2011, entitled SERVICE DESIGN CENTER FOR DEVICE ASSISTED SERVICES; and U.S. application Ser. No. 13/374,959, filed Jan. 24, 2012, entitled FLOW TAGGING FOR SERVICE 65 POLICY IMPLEMENTATION; U.S. application Ser. No. 13/441,821, filed Apr. 6, 2012, entitled MANAGING SER-

2

VICE USER DISCOVERY AND SERVICE LAUNCH OBJECT PLACEMENT ON A DEVICE; U.S. application Ser. No. 13/134,005, filed May 25, 2011, entitled SYSTEM WIRELESS METHOD FOR NETWORK OFFLOADING; U.S. application Ser. No. 13/802,483, filed Mar. 13, 2013, entitled MOBILE DEVICE ACTIVATION VIA DYNAMICALLY SELECTED ACCESS NETWORK; U.S. application Ser. No. 13/842,172, filed Mar. 15, 2013, entitled NETWORK SERVICE PLAN DESIGN; and U.S. application Ser. No. 13/748,152, filed Jan. 23, 2013, entitled SERVICE PLAN DESIGN, USER INTERFACES, APPLI-**CATION** PROGRAMMING INTERFACES, DEVICE MANAGEMENT.

This document incorporates by reference for all purposes the following provisional patent applications: U.S. Provisional Application No. 61/206,354, filed Jan. 28, 2009, entitled SERVICES POLICY COMMUNICATION SYS-TEM AND METHOD; U.S. Provisional Application No. 61/206,944, filed Feb. 4, 2009, entitled SERVICES POLICY COMMUNICATION SYSTEM AND METHOD; U.S. Provisional Application No. 61/207,393, filed Feb. 10, 2009, entitled SERVICES POLICY COMMUNICATION SYS-TEM AND METHOD; and U.S. Provisional Application No. 61/207,739, entitled SERVICES POLICY COMMUNI-CATION SYSTEM AND METHOD, filed Feb. 13, 2009; U.S. Provisional Application No. 61/270,353, filed on Jul. 6, 2009, entitled DEVICE ASSISTED CDR CREATION, AGGREGATION, MEDIATION AND BILLING; U.S. Provisional Application No. 61/275,208, filed Aug. 25, 2009, entitled ADAPTIVE AMBIENT SERVICES; and U.S. Provisional Application No. 61/237,753, filed Aug. 28, 2009, entitled ADAPTIVE AMBIENT SERVICES; U.S. Provisional Application No. 61/252,151, filed Oct. 15, 2009, entitled SECURITY TECHNIQUES FOR DEVICE ASSISTED SERVICES; U.S. Provisional Application No. 61/252,153, filed Oct. 15, 2009, entitled DEVICE GROUP PARTITIONS AND SETTLEMENT PLATFORM; U.S. Provisional Application No. 61/264,120, filed Nov. 24, 2009, entitled DEVICE ASSISTED SERVICES INSTALL; 2009, entitled DEVICE ASSISTED SERVICES ACTIVITY MAP; U.S. Provisional Application No. 61/348,022, filed May 25, 2010, entitled DEVICE ASSISTED SERVICES FOR PROTECTING NETWORK CAPACITY; U.S. Provisional Application No. 61/381,159, filed Sep. 9, 2010, entitled DEVICE ASSISTED SERVICES FOR PROTECT-ING NETWORK CAPACITY; U.S. Provisional Application No. 61/381,162, filed Sep. 9, 2010, entitled SERVICE CONTROLLER INTERFACES AND WORKFLOWS; U.S. Provisional Application No. 61/384,456, filed Sep. 20, 2010, entitled SECURING SERVICE PROCESSOR WITH SPONSORED SIMS; U.S. Provisional Application No. 61/389,547, filed Oct. 4, 2010, entitled USER NOTIFICA-TIONS FOR DEVICE ASSISTED SERVICES; U.S. Provisional Application No. 61/385,020, filed Sep. 21, 2010, entitled SERVICE USAGE RECONCILIATION SYSTEM OVERVIEW; U.S. Provisional Application No. 61/387,243, filed Sep. 28, 2010, entitled ENTERPRISE AND CON-SUMER BILLING ALLOCATION FOR WIRELESS COMMUNICATION DEVICE SERVICE USAGE ACTIVITIES; U.S. Provisional Application No. 61/387, 247, filed September 28, entitled SECURED DEVICE DATA RECORDS, 2010; U.S. Provisional Application No. 61/407,358, filed Oct. 27, 2010, entitled SERVICE CON-TROLLER AND SERVICE PROCESSOR ARCHITEC-TURE; U.S. Provisional Application No. 61/418,507, filed Dec. 1, 2010, entitled APPLICATION SERVICE PRO-

#: 786

Document 65-1

3

VIDER INTERFACE SYSTEM; U.S. Provisional Application No. 61/418,509, filed Dec. 1, 2010, entitled SERVICE USAGE REPORTING RECONCILIATION AND FRAUD DETECTION FOR DEVICE ASSISTED SERVICES; U.S. Provisional Application No. 61/420,727, filed Dec. 7, 2010, 5 entitled SECURE DEVICE DATA RECORDS; U.S. Provisional Application No. 61/422,565, filed Dec. 13, 2010, entitled SERVICE DESIGN CENTER FOR DEVICE ASSISTED SERVICES; U.S. Provisional Application No. 61/422,572, filed Dec. 13, 2010, entitled SYSTEM INTER- 10 FACES AND WORKFLOWS FOR DEVICE ASSISTED SERVICES; U.S. Provisional Application No. 61/422,574, filed Dec. 13, 2010, entitled SECURITY AND FRAUD DETECTION FOR DEVICE ASSISTED SERVICES; U.S. Provisional Application No. 61/435,564, filed Jan. 24, 2011, 15 entitled FRAMEWORK FOR DEVICE ASSISTED SER-VICES; U.S. Provisional Application No. 61/472,606, filed Apr. 6, 2011, entitled MANAGING SERVICE USER DIS-COVERY AND SERVICE LAUNCH OBJECT PLACE-MENT ON A DEVICE; U.S. Provisional Application No. 20 61/550,906, filed Oct. 24, 2011, entitled SECURITY FOR DEVICE-ASSISTED SERVICES; U.S. Provisional Application No. 61/589,830, filed Jan. 23, 2012, entitled METH-ODS AND APPARATUS TO PRESENT INFORMATION ABOUT VOICE, MESSAGING, AND DATA SERVICES 25 ON WIRELESS MOBILE DEVICES; U.S. Provisional Application No. 61/610,876, filed Mar. 14, 2012, entitled METHODS AND APPARATUS FOR APPLICATION PROMOTION AND SPONSORSHIP; U.S. Provisional Application No. 61/610,910, filed Mar. 14, 2012, entitled 30 WIFI ACTIVATION BACKUP PROCESS; U.S. Provisional Application No. 61/658,339, filed Jun. 11, 2012, entitled MULTI-DEVICE MASTER SERVICES ACCOUNTS, SERVICE PLAN SHARING AND ASSIGNMENTS, AND DEVICE MANAGEMENT FROM A MASTER DEVICE; 35 U.S. Provisional Application No. 61/667,927, filed Jul. 3, 2012, entitled FLEXIBLE MULTI-DEVICE MASTER SERVICE ACCOUNTS, SERVICE PLAN SHARING AND ASSIGNMENTS, AND DEVICE MANAGEMENT; U.S. Provisional Application No. 61/674,331, filed Jul. 21, 2012, 40 number transfer request from the device. entitled SERVICE CONTROLLER FOR MANAGING CLOUD-BASED POLICY; U.S. Provisional Application No. 61/724,267, filed Nov. 8, 2012, entitled FLEXIBLE SERVICE PLAN DESIGN, USER INTERFACE AND DEVICE MANAGEMENT; U.S. Provisional Application 45 fication listing the information to complete a phone number No. 61/724,837, filed Nov. 9, 2012, entitled SERVICE PLAN DISCOVERY, CUSTOMIZATION, AND MAN-AGEMENT; U.S. Provisional Application No. 61/724,974, filed Nov. 10, 2012, entitled SERVICE PLAN DISCOV-ERY, CUSTOMIZATION, AND MANAGEMENT; U.S. 50 Provisional Application No. 61/732,249, filed Nov. 30, 2012, entitled APPLICATION PROGRAMMING INTER-FACES FOR SMART SERVICES; U.S. Provisional Application No. 61/734,288, filed Dec. 6, 2012, entitled INTER-MEDIATE NETWORKING DEVICE SERVICES; and U.S. 55 Provisional Application No. 61/745,548, filed Dec. 22, 2012, entitled SERVICE PLAN DESIGN, USER INTER-FACES, APPLICATION PROGRAMMING INTER-FACES, AND DEVICE MANAGEMENT; U.S. Provisional Application No. 61/756,332, filed Jan. 24, 2013, entitled 60 MOBILE HOTSPOT; U.S. Provisional Application No. 61/758,964, filed Jan. 30, 2013, entitled MOBILE HOTSPOT; U.S. Provisional Application No. 61/765,978, filed Feb. 18, 2013, entitled ENHANCED CURFEW AND PROTECTION ASSOCIATED WITH A DEVICE GROUP; 65 U.S. Provisional Application No. 61/794,116, filed Mar. 15, 2013, entitled ENHANCED INTERMEDIATE NET-

WORKING DEVICE; U.S. Provisional Application No. 61/792,765, filed Mar. 15, 2013, entitled DEVICE GROUP AND SERVICE PLAN MANAGEMENT; U.S. Provisional Application No. 61/793,894, filed Mar. 15, 2013, entitled SIMPLIFIED POLICY DESIGN, MANAGEMENT, AND IMPLEMENTATION; U.S. Provisional Application No. 61/799,710, filed Mar. 15, 2013, entitled AMBIENT OR SPONSORED SERVICES; and U.S. Provisional Application No. 61/801,074, filed Mar. 15, 2013, entitled DEVICE GROUP AND SERVICE PLAN MANAGEMENT.

BACKGROUND

With the advent of mass-market wireless mobile devices and subscription wireless services, there are an increasing number of instances in which a mobile device user who has subscribed to a service provided by a service provider will stop using one device in favor of a new or otherwise different device, or stop his or her subscription with one service provider in favor of subscribing with another service provider. It is often the case that when a subscriber obtains a new device or moves from one service provider to another, the subscriber wishes to remain associated with the same phone number he or she has been using.

BRIEF DESCRIPTION OF THE DRAWINGS

Objects, features, and advantages of the present disclosure will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 illustrates components of a wireless network architecture in accordance with some embodiments.

FIG. 2 illustrates components of a mobile device in accordance with some embodiments.

FIG. 3 illustrates a flow diagram for updating one or more credentials of a mobile device in accordance with some embodiments.

FIG. 4 illustrates an exemplary screen including a mechanism to request a new phone number or initiate a phone

FIG. 5 illustrates an exemplary number management screen displayed when a user selects the "Transfer" region of FIG. 4.

FIG. 6 illustrates an exemplary screen displaying a noti-

FIGS. 7A and 7B illustrate an exemplary screens for entering account information to complete a phone number

FIG. 8 illustrates an exemplary screen requesting confirmation from the user to initiate the phone number transfer request.

FIG. 9 illustrates an exemplary screen displaying a notification that the number transfer request has been initiated.

FIG. 10 illustrates an exemplary screen displaying a notification that the number transfer request has been successfully requested.

FIG. 11 illustrates an exemplary screen displaying a notification that the phone number has been successfully transferred to the device.

FIG. 12 illustrates an exemplary screen displaying a notification that the number transfer process has been successfully completed.

FIG. 13 illustrates an exemplary screen displaying a notification that the device is checking whether the user requested a transfer of the user's existing mobile number to the new device.

#: 787

5

FIG. 14 illustrates an exemplary screen displaying a notification that the phone number transfer request has been initiated.

FIG. 15 is a transactional diagram illustrating a deviceinitiated number porting process with automatic reprogramming in accordance with some embodiments.

DETAILED DESCRIPTION

This document discloses a mobile device wireless service management system to provide automated phone number porting (also referred to herein as "phone number transferring" or "number transfer").

A wireless device (also referred to herein as a "mobile device" or simply as a "device") communicates over a wireless access network (also referred to as the "network") with a network system comprising one or more network elements to access resources, such as data services, voice services, messaging services, transactional services, etc.

In a wireless network system, mobile devices authenticate with the network system based on credentials that are stored on the device and verified by the network system. Examples of credentials include, but are not limited to, a phone number, an international mobile subscriber identifier (IMSI), 25 a mobile station identifier (MSID), a mobile station international ISDN number (MSISDN), a subscriber information module (SIM) identifier, an electronic serial number (ESN), a mobile equipment identifier (MEID), an international mobile equipment identity (IMEI), a device identifier, a 30 subscriber identifier, a service account identifier, a media access control (MAC) address, an Internet protocol (IP) address, a token, a one-time token, a mobile directory number (MDN), a network access identifier (NAI), a user name, a password, access point name (APN) configuration 35 information (e.g., APN name, APN username, APN password, APN gateway, APN SMSC/MMSC, APN type, etc.), an encryption key (Ki), a Wi-Fi service set identifier (SSID), a Wi-Fi network configuration (e.g., access point (AP) name, AP IP address, AP username, AP password, AP encryption 40 type, AP security key, etc.), an IP address, any other identifying information that uniquely identifies a wireless device, and combinations of these. Some credentials (e.g., an ESN, a device identifier, etc.) are permanently associated with a device. But other credentials (e.g., a SIM, a phone 45 number, etc.) may be moved from one device to another device. These movable credentials are referred to herein as "portable credentials."

To gain access to a wireless access network, a subscriber needs some sort of account with the service provider (also 50 referred to as an "operator," "network operator," "wireless operator," or similar term). Although some consumers choose pre-loaded, pre-paid, "disposable" devices, many consumers have ongoing accounts (either pre-pay or postpay) with service providers. A subscriber's account with a 55 service provider is typically associated with a portable credential. For example, a subscriber account may be associated with a SIM card that stores information needed for a device containing the SIM to access a particular service provider's network.

When a device is capable of making phone calls, the device and the subscriber's account are associated with a telephone number (or "phone number"), which can be ported from one device to another or from one service provider to another. It is often the case that when a subscriber obtains a new device or moves his or her service subscription from one service provider to another, the sub6

scriber wishes to remain associated with the same phone number he or she has been using.

There are several circumstances in which a phone number that is currently associated with a particular device and a current service provider needs to be ported. First, a subscriber could decide to upgrade or change the particular device to a new device, but stay with the current service provider and keep the current phone number. Second, a subscriber could decide to change from the current service provider to a new service provider, but keep the particular device and the current phone number. Third, a subscriber could decide to change from the current service provider to the new service provider, and also upgrade or change the particular device to the new device, but keep the current phone number. Fourth, a subscriber could have a first device associated with a first phone number and a first service provider, and a second device associated with a second phone number and a second service provider, and the subscriber wishes to port the first phone number to the 20 second device.

When the subscriber decides to upgrade or change the particular device to a new device, but chooses to stay with the current service provider and keep the current phone number, the porting of the phone number is typically simple because the subscriber already has an account with the current service provider, and the subscriber's phone number is already recognized by the current service provider. For GSM devices, porting the subscriber's phone number from the current device to the new device is accomplished by moving the SIM from the current device to the new device, which can often be done by the subscriber without support from or, in some cases, knowledge of the current service provider.

When the subscriber changes from the current service provider to a new service provider, however (e.g., the second, third, and fourth cases described above), the process of porting a number from one service provider to another takes some amount of time and can, in extreme cases, take days. At some point during the number porting process, the device and the network system of the current service provider can no longer communicate, and the device and the network system of the new service provider cannot communicate until the credentials stored on the device are updated to match the credentials stored in the new service provider's network system. Sometimes the new service provider sets up the subscriber's mobile device with temporary credentials so the mobile device can operate on the new wireless provider's network while the number porting process is ongoing. The temporary credentials allow the subscriber to begin using service with the new service provider immediately, even though the number porting is not complete. But because the credentials that allow the subscriber to use service with the new service provider while the number porting process is ongoing are temporary credentials, when the porting process is complete, the subscriber's mobile device needs to be updated with the desired credentials, including the subscriber's phone number.

Today, when it is necessary to update a wireless device using temporary credentials so that the device thereafter uses 60 the intended credentials, the user of the wireless device may need to intervene to update the credentials so the device can communicate with the new service provider's network system with its desired credentials. This intervention is sometimes a sequence of steps that forces the device into a state where it can contact a programming server to get its credentials updated. Other times, the sequence entails the user manually programming the credentials into the device.

#: 788

Document 65-1

7

Disclosed herein are systems, devices, and methods that provide for the updating of device credentials after a phone number port without user intervention. In some embodiments, the mobile device detects a network provisioning state change (e.g., detects that the device credentials are to 5 be updated) and automatically initiates a programming session with a programming server to enable the device to obtain the desired credentials without the intervention of the user. Automation of this process ensures that the updating of credentials occurs when necessary and without user inter- 10 vention. One of the benefits of this process is that it can reduce calls to a customer care center because this process helps to ensure that the device does not enter into a state in which it cannot interact with the network system and, as a result, appear to be unusable to the end user.

In some embodiments, the device comprises one or more device agents that determine when the desired phone number, previously associated with a different service provider, is available for porting onto the device so that a user of the device does not need to take any action to determine when 20 the number is available for porting or to begin the porting process. In these and other embodiments, the one or more device agents may be configured to automatically determine that the desired phone number is available for porting and initiate the device side of the number porting process. In 25 some embodiments, the one or more device agents are embodied in a service processor on the device.

In some embodiments, the device user can initiate number porting during initial account set up or creation, or during initial device setup, directly on the device. In some embodiments, the user can enter, through a user interface of the device, a request to cause a different device's phone number to be ported onto the device.

FIG. 1 illustrates components of a typical wireless network system. Mobile device 100 communicates with core 35 network 110 through base station 125. To gain access to voice, messaging, and data services, mobile device 100 authenticates with various network elements, including home location register (HLR) 132, authentication server 1153, and network access gateway 1151. Failure to authen- 40 ticate with these elements normally results in denied service access via the wireless network.

In some embodiments, a subscriber is able to initiate a number port (or "number transfer") directly from mobile device 100. In some embodiments, the subscriber accesses a 45 device application and enters, into a device application user interface (UI), the information needed to initiate the port. In some embodiments, the number porting is assisted by one or more device agents that run on the mobile device that the phone number is desired to be ported to. The one or more 50 device agents can comprise an application program, an operating system (OS) component, an OS function, an OS service, a modem programming agent, a modem software or firmware agent, an over-the-air (OTA) mobile device parameter programing agent, an Open Mobile Alliance (OMA) 55 agent, a secure communication agent configured to communicate number porting and number provisioning information, another software or firmware agent, or a combination of these.

In some embodiments, the one or more device agents 60 communicate with one or more network elements (e.g., porting server 1154) that are configured to exchange number porting information and number provisioning information with the one or more device agents. In some embodiments, the one or more device agents establish a secure communi- 65 cation link with the one or more network elements to allow the secure exchange of number porting information and

8

number provisioning information. In some embodiments, the formatting and/or protocols for the communications between the one or more device agents and the one or more network elements are established according to an application programming interface (API) between the one or more device agents responsible for (e.g., initiating) number porting and the one or more network elements that assist in the

In some embodiments, after the one or more device agents collect the information from the subscriber, the one or more device agents communicate the information to porting server 1154. In some embodiments, the communication is over a cellular network. In some embodiments, the communication is over the short messaging service (SMS) channel. In some embodiments, the communication is over a Wi-Fi network. Porting server 1154 is responsible for initiating and managing the porting process between the wireless operator and the porting agency (or the subscriber's previous service provider, or an intermediary brokering system). In some embodiments, mobile device 100 stores a local copy of the subscriber's phone number that was entered on the device application when the port was initiated.

In some embodiments, a subscriber wishes to port a phone number associated with a second device or a second service account (the "second phone number") to a first device. In some such embodiments, the number porting is assisted by one or more network elements (e.g., porting server 1154) that are configured to communicate with the one or more device agents on the first device to exchange account information. The one or more network elements then submit the request or instruction to port the second phone number to the first device to a subscriber management system responsible for managing the association of the second phone number with the second device or the second service account. The one or more network elements then obtain an indication that the second phone number has been released, and the one or more network elements communicate with the one or more device agents to cause the second phone number to be ported to the first device. In some embodiments, a subscriber management system responsible for managing the association of the second phone number with the first device participates in the number porting process by provisioning an aspect of the network policy associated with the first device to recognize or authenticate the second phone number for the first device.

In some embodiments, a first subscriber management system that manages a first device communicates with a second subscriber management system that manages a second device to request the phone number port and provides user information to authenticate the port of a phone number from either the first device to the second device or vice versa. In some embodiments the first device and/or number and second device and/or number are both managed by the same subscriber management system; in this case, the subscriber management system goes to itself to request the number port and provides user information to authenticate the port.

Once the porting process is complete, porting server 1154 updates wireless operator provisioning server 162, which then provisions certain network elements, including programming server 1152, with the new credentials (e.g., telephone number, network access identifier (NAI), user name, password, IP address, etc.), including the telephone number. In some embodiments, the updating of the provisioning information to the network elements will cause mobile

#: 789

Document 65-1

9

device 100 to stop functioning on the network because its credentials are no longer associated with an active sub-

In some embodiments, when the provisioning of the network system with the new device credentials is complete, 5 mobile device 100 detects that it can no longer access the network. Detection of denied access to the network can include failed registration attempts, failed authentication attempts (e.g., invalid user name, invalid password, invalid telephone number, invalid device identifier, etc.), or failed 10 authorization for services. When mobile device 100 detects that it can no longer access the network, it checks its internal state. In some embodiments, detecting the internal state comprises comparing one or more current device credentials with an expected credential (e.g., comparing a current phone 15 number with an expected new phone number). When mobile device 100 detects that a current device credential does not match the expected credential, and mobile device 100 expects the credential to change, mobile device 100 enters into a programming session with programming server 1152. 20 In some embodiments, putting mobile device 100 into a programming session entails providing a set of bootstrap credentials to mobile device 100, where the bootstrap credentials provide the mobile device with limited access to the network (e.g., mobile device 100 can only access the pro- 25 gramming server 1152 either directly or indirectly via network access gateway 1151). In some embodiments, mobile device 100 is configured to communicate with programming server 1152 via a Wi-Fi or another type of alternative network. In some embodiments, the subscriber associated 30 with mobile device 100 is not charged for usage of the wireless access network or alternative network associated with the device's communications with programming server 1152 (i.e., usage is not accounted to a user account, or usage is zero-rated by the service provider or another party).

Once mobile device 100 has access to programming server 1152, mobile device 100 initiates a programming communication session with programming server 1152. In some embodiments, device interaction with programming server 1152 is over the data channel, the SMS channel, the 40 voice channel, the unstructured supplementary service data (USSD) channel, or over Wi-Fi or another network that provides mobile device 100 with access to programming server 1152. In some embodiments, when mobile device 100 is accessing programming server 1152, access to other 45 network elements or network end-points is restricted or prohibited. Programming server 1152 delivers the new device credentials to the mobile device 100. Mobile device 100 receives the updated credentials and stores the new credentials locally on the device. Upon completion of the 50 programming session, mobile device 100 begins to use the new credentials to access the wireless network. In some embodiments, mobile device 100 compares the new credentials to the expected credentials to determine if the current credentials are, in fact, the expected credentials or additional 55 interim credentials. In some embodiments, if the current credentials match the expected credentials, the update process is determined to be complete.

In some embodiments, an over the air device provisioning network element (e.g., programming server 1152) partici- 60 pates in the number porting process by causing an aspect of a first device's credentials to be re-programmed to provision a new phone number onto the first device. In some embodiments, the aspect of the first device's credentials that is re-programmed to provision the new phone number onto the 65 first device comprises the phone number or mobile directory number (MDN), NAI, password, access point name (APN)

10

configuration information (e.g., APN name, APN username, APN password, APN gateway, APN SMSC/MMSC, APN type, etc.), username, IP address, MAC address, international mobile subscriber identity (IMSI), encryption key (Ki), Wi-Fi service set identifier (SSID), Wi-Fi network configuration (e.g., access point (AP) name, AP IP address, AP username, AP password, AP encryption type, AP security key, etc.), or a combination of these.

It is to be appreciated that the functions described above are illustrated in FIG. 1 in a particular way, but that the functions may be disposed differently than shown in FIG. 1. In particular, the functions may be performed by more or fewer network elements than shown in FIG. 1.

FIG. 2 illustrates various components of mobile device 100, including UI display 1000, through which the subscriber can interact with the device application via the display and UI element (e.g., on-screen keyboard, speech recognition processor, physical keyboard, etc.). Current credential storage 1157 is device memory where mobile device 100 stores its current credentials to access the wireless network. In some embodiments, current credential storage 1157 is protected or encrypted to prohibit the user from directly (or indirectly) modifying the information stored in current credential storage 1157. In some embodiments, current credential storage 1157 is accessible only to the wireless modem that allows the device to access the wireless access network.

Programming session credential storage 1156 is device memory where mobile device 100 stores the credentials and configuration to access programming server 1152. In some embodiments, the programming session credentials include network type (e.g., cellular, Wi-Fi, Bluetooth, etc.), network name (e.g., APN name, Wi-Fi SSID, etc.) or other information that enables mobile device 100 to access programming server 1152. In some embodiments, programming session credential storage 1156 is protected or encrypted to prohibit the user from directly (or indirectly) modifying the information stored in programming session credential storage 1156. In some embodiments, programming session credential storage 1156 is accessible only to the wireless modem that allows the device to access the wireless access network.

Expected credential storage 1158 is device memory where mobile device 100 stores the expected credentials to be programmed to mobile device 100. In some embodiments, mobile device 100 uses the expected credentials to detect when mobile device 100 has received its final set of credentials related to the transaction that caused the credentials to change (e.g., a request to port a new phone number to mobile device 100). For example, the expected credentials could be the porting phone number, a new network access identifier, a new IP address, etc.

It is to be appreciated that although FIG. 2 illustrates current credential storage 1157, expected credential storage 1158, and programming session credential storage 1156 separately, they may all be located in the same memory (which may be secure memory).

FIG. 3 is a flowchart showing a procedure to update one or more credentials of a mobile device in accordance with some embodiments. At 1160, the procedure starts. At 1161, the device user requests to have at least some aspect of the one or more device credentials changed via a UI interaction on the device. Examples of UI interaction include interaction with a browser application, an OS application, an OS settings application, a native application, etc. The UI interaction causes the device to communicate with an application server (e.g., porting server 1154, programming server 1152) to facilitate and complete the credential change request.

11

At 1162, the device stores (e.g., using one or more device agents) the requested credential information locally on the device. In some embodiments, the device receives this information from the application server or other network element. In some embodiments, the device receives this 5 information from the UI interaction application on the device or from the one or more device agents. In some embodiments, the requested credential information includes information about all of the one or more credentials that requested credential information contains a subset of information about all of the one or more credentials that were requested to be changed. In some embodiments in which, at the time the number port is requested, the device is associated with a first phone number and/or other first 15 credential(s), the number being ported and/or other reprovisioning information is not fully programmed onto the device before the first number and/or other first credential(s) become partially invalid or invalid.

change. There are a number of ways in which the device can detect the network provisioning state change, including denied registration attempts, denied voice call attempts, denied text message transmission attempts, failed authentication with a network element, failed authorization for 25 services, or any other mechanism that signals the device that network provisioning has changed.

At 1164, the device determines whether a current credential matches the requested credential to determine if there is a mismatch between the credential that is currently programmed on the device and the credential that the device is expecting to be programmed on the device. In some embodiments, the requested credential may be a configuration state indicator, and the device inspects the configuration state indicator to determine if the device expected additional 35 credential updates associated with the credential change request.

At 1165, the device has determined that it is expecting a credential update, and as a result the device initiates a programming session (e.g., the one or more device agents 40 initiate a programming session). In some embodiments, initiating a programming session entails setting the device to a well-known configuration state (e.g., a bootstrap state, etc.) to enable the device to contact a network element (e.g., programming server 1152). In some embodiments, initiating 45 a programming session entails switching the device to an alternative network (e.g., Wi-Fi, etc.) or communication channel (e.g., SMS, etc.) prior to initiating communications with the network element (e.g., programming server 1152). In some embodiments, the communication with the network 50 element (e.g., programming server 1152) utilizes an ambient service so that usage of the wireless access network associated with the device's communication with the network element is subsidized or paid-for by an entity other than the party responsible for paying for access to the wireless access 55 network by the device (e.g., the party responsible for paying for access to the wireless access network by the device is the user, subscriber, account-holder, enterprise, parent, etc.). In some embodiments, when the communication with the network element (e.g., programming server 1152) occurs using 60 an ambient service, the party responsible for paying for access to the wireless access network by the device (e.g., the user, subscriber, account-holder, enterprise, parent, etc.) is not charged for the network communications associated with the device programming.

At 1166, the device communicates with the network element (e.g., programming server 1152) to obtain its 12

updated credential(s). In some embodiments, the device performs an authentication process with the network element (e.g., programming server 1152). In some embodiments, the configuration data is encrypted or delivered over an encrypted and secure channel. In some embodiments, the configuration data is encrypted using device-specific information (e.g., an IMSI, Ki, A-key, MAC address, etc.), either directly or indirectly.

At 1167, after the device receives its updated credentials, were requested to be changed. In some embodiments, the 10 it updates its local memory with the new credentials. In some embodiments, the updated credentials also include updated device configuration information (e.g., access server information, new data network configuration, device UI configuration, branding information, etc.). For example, the updated device configuration information can include a logo, color scheme, icon, or any other branding information that indicates the device is now associated with a different service provider.

At 1168, the device compares the updated credentials with At 1163, the device detects the network provisioning state 20 the expected credentials to determine if the credential update process associated with the initial transaction (at 1161) is complete. In some embodiments, there may be additional interim credentials assigned to the device while the transaction is in progress. In some embodiments, the transaction requires multiple credential updates. In some embodiments, the device checks a credential update state variable to determine if the credential update process is complete. If the credential update process is complete, the process ends at 1169. If the device expects further credential updates associated with the transaction initiated at 1161, the device continues to monitor for network provisioning state change (at 1163) and continues the cycle until the credential update process completes.

> In some embodiments, the device performs the updating process automatically without informing the subscriber. In some embodiments, the credential update occurs in the background and is undetected by the user. In some embodiments, the programming process requires the device to be restarted one or more times. In some embodiments, when a reboot is required, it is desirable to present a visual or audible notification to the user to inform the user that the device is updating and/or rebooting. In some embodiments, the notification enables the user to postpone the update and/or device reboot.

> In some embodiments, the one or more device agents present a number porting option through a first device's UI to enable a user to port a phone number that is currently assigned to a second device (the "second phone number") onto the first device. In some embodiments, such as the exemplary embodiment shown in FIG. 4, the one or more device agents present an account UI screen 1170 to the user and provide a mechanism to request a new phone number or initiate a phone number transfer (e.g., port of the second phone number to the first device) request from the device. The UI element could be a menu item, a status bar item, a list item, dialog box, or any other UI construct to enable the user to initiate a phone number transfer request. In the embodiment illustrated by FIG. 4, the UI construct is a touch-sensitive button the user can touch to initiate a number transfer. As illustrated by FIG. 4, the screen 1170 informs the user that the user can press the "Transfer" button either to transfer an existing number to the device, or to request a new

> In some embodiments, such as the exemplary embodiment shown in FIG. 5, in response to the user initiating a transfer (e.g., selecting "Transfer" in the embodiment shown in FIG. 4), the one or more device agents present a number

13

management screen 1171 to the user and provide a mechanism to either request a new number or initiate a number transfer (port) request from the device. The UI element could be a menu item, a status bar item, a list item, dialog box, or any other UI construct to enable the user to manage 5 his or her phone number on the device. In some embodiments, the one or more device agents may restrict the parties who are authorized to transfer a number. In the embodiment shown in FIG. 5, for example, a number transfer can be initiated from any device with the "Admin" role, where the 10 "Admin" role is held by a subscriber, a parent, an enterprise, a device group manager, or any other designated party who is authorized to modify the settings or characteristics of the device for which the number transfer is being requested.

In some embodiments, when the user initiates the transfer 15 of the second phone number from a first service provider to a second service provider (e.g., the user selects "Transfer my number from another phone" on the screen 1171 shown in FIG. 5), the one or more device agents present a screen to inform the user about information the user will need to 20 provide in order to complete the request. In the embodiment shown in FIG. 6, for example, the one or more agents assist in presenting a notification 1172 through the display to inform the user that he or she should have a copy of the user's last bill from the first service provider (so that the user 25 can enter, for example, an account number or other information commonly found on a service provider bill), the phone number to transfer, the first and last name of the user, the user's address, and the user's social security number or account number (or account name) with the first service 30 provider.

In some embodiments, when the user accepts the number porting option (e.g., the user selects the "Continue" option of FIG. 5 or the "OK" option of FIG. 6), the one or more device agents present a screen to gather the second phone 35 number, user information, and/or account information associated with the service account currently associated with the second phone number. In some embodiments, such as the representative screens 1173 and 1174 illustrated in FIGS. 7A and 7B, once the user decides to initiate a phone number 40 transfer request, the user enters the requested information through the device UI to allow the second phone number to be transferred to the device (e.g., from a first service provider currently providing service to the second phone number to the service provider associated with the device to 45 which the second phone number is requested to be transferred). In some embodiments, the information entered by a user to transfer a phone number includes one or more of the following pieces of information: phone number to transfer, billing first name, billing last name, company name, billing 50 address (e.g., street number, street name, city, state, ZIP code), user's social security number, a portion of the user's social security number (e.g., last 4 digits), current-serviceprovider account number, current-service-provider account password, current-service-provider account PIN, or any 55 other information to identify the subscriber or the account with the current service provider. In some embodiments, to prevent the inadvertent or malicious transfer of the second phone number to the device, the information entered includes information that is or should only be known by a 60 subscriber associated with the second phone number (e.g., some or all of the subscriber's social security number, account number, password, PIN, etc.)

In some embodiments, all of the information to be collected to initiate the transfer of the second phone number to 65 the device is entered on a single UI screen. In some embodiments, such as the exemplary embodiment of FIGS.

14

7A and 7B, the information to be collected is entered on multiple UI screens 1173 and 1174. In some embodiments, the user is queried about the current service provider (e.g., identifying information about the service provider currently providing service associated with the second phone number). In some embodiments, a network element assists in determining the current service provider by querying an entity. In some embodiments, the entity is a local database, a porting management entity, a remote database, or another system that contains the information. In some embodiments in which the current service provider is known, the information to be collected by the one or more device agents on the mobile device is tailored to the requirements of the current service provider (e.g., service provider "A" only requires first name, last name, phone number to port, and billing zip code; service provider "B" only requires phone number to port and account password, etc.).

In some embodiments, after the user enters the information needed for the one or more device agents to initiate the number transfer, the one or more device agents assist in presenting a confirmation screen through the user interface of the device. FIG. 8 illustrates an example of such a confirmation screen 1175. As shown in FIG. 8, the confirmation screen 1175 informs the user that it is important that the information provided by the user to initiate the transfer of the second phone number be correct. The screen of FIG. **8** asks the user to review the information and confirm that the information entered is correct.

In some embodiments, after the user has provided the information needed for the one or more device agents to initiate the number transfer (e.g., the user has provided the information requested by the screens 1173 and 1174 illustrated in FIGS. 7A and 7B, or the user has selected "OK" from the screen 1175 illustrated in FIG. 8), the one or more device agents initiate the number transfer and provide a notification to the user that the number transfer process is beginning FIG. 9 illustrates a specific embodiment of such a notification 1176. As shown in FIG. 9, the notification 1176 may include an icon or other indicia to indicate to the user that the number transfer information is being submitted.

In some embodiments, after the one or more device agents have successfully initiated the number transfer, the one or more device agents assist in providing a notification to the user to inform the user that the number transfer has been requested. In some embodiments, the notification provides additional information, such as when the number transfer is expected to be completed. FIG. 10 illustrates a particular embodiment of such a notification 1177. The notification 1177 informs the user that the number transfer has been successfully requested, and that transferring the number may take up to four hours to complete.

In some embodiments, as the porting process proceeds, the one or more device agents present notification messages (e.g., audible or visible notifications) through a first device UI to inform the user of the progress of the porting process. For example, the one or more device agents can present one or more messages through a display to inform the user that the port is proceeding, that the device has limited or no access to the wireless access network, that settings are being updated, that information is being loaded, that the device needs to be rebooted, etc. For example, the messages may inform the user that the user needs to reboot the device in order for the number port to complete. FIG. 11 illustrates a particular embodiment of such a notification 1178. In the embodiment of FIG. 11, the notification 1178 informs the user that the phone number has been successfully transferred to the device. In the embodiment of FIG. 11, the notification

#: 792

Document 65-1

15

1178 also informs the user that the device will need to update itself with its new number, and that during the update process, the user will not be able to use the device or make emergency calls. In addition, in the embodiment of FIG. 11. the notification 1178 informs the user that during the update 5 process, the device will restart twice without user intervention, and the user may see additional messages as the device updates and activates. In the embodiment of FIG. 11, the notification 1178 presents the user with an option to defer the updating process until later.

The one or more device agents can also present a notification upon completion of the number porting process to inform the user that the port was successful and/or that the device is now associated with the second phone number. 15 FIG. 12 illustrates one such embodiment. In the embodiment of FIG. 12, the notification 1179 informs the user that the device is now active with its new number (the second phone

The one or more device agents can also present a notifi- 20 cation if the number porting process fails, where such notification informs the user of the failure and, in some embodiments, provides additional information about the failure and/or directs the user to customer service for assis-

In some embodiments, a user orders a new device through a website associated with the new service provider. In some such embodiments, the user specifies when ordering the new device that the user wishes to port an existing phone number to the new device. Because the user does not want the number to be ported before the user has received the device, the new service provider pre-configures the new device with information that will allow the transfer of the existing number to the new device after the user receives the new device. When the user receives the new device and powers on the device, the device initiates the number transfer using information pre-configured by the new service provider. FIG. 13 illustrates a notification message 1180 that a user of the new device sees in accordance with a particular embodi- 40 ment. As shown in FIG. 13, the one or more device agents assist in presenting a notification message 1180 that informs the user that the one or more device agents are checking to see whether the user requested a transfer of the user's existing mobile number to the new device. FIG. 14 illus- 45 trates a notification message 1181 that a user of the new device might see if the one or more device agents determine that the user requested a number transfer prior to receiving the new device. In the embodiment illustrated in FIG. 14, the notification message 1181 informs the user that the number 50 transfer request is being initiated. In some embodiments in which the user requests a number transfer at the time of ordering a device, the one or more device agents perform one or more of the tasks described previously in the context

FIG. 15 illustrates a device-initiated number porting process with automatic reprogramming according to some embodiments. In FIG. 15, the subscriber 1010 desires to port his number from his or her prior service provider to a new service provider. The subscriber 1010 initiates a port request 60 with assistance from one or more device agents (shown simply as "Device Agent" in FIG. 15). The one or more device agents assist in collecting the number porting information from the subscriber 1010. The one or more device agents can comprise one or more of an application program, 65 an operating system (OS) component, an OS function, an OS service, a modem programming agent, a modem software or

16

firmware agent, an over-the-air (OTA) mobile device parameter programming agent, an Open Mobile Alliance (OMA) agent, a secure communication agent configured to communicate number porting and number provisioning information, or another software or firmware agent.

Once the one or more device agents collect the porting information from the subscriber, the one or more agents communicate with porting server 1154A to communicate the porting request. Porting server 1154A is associated with the new service provider. Porting server 1154A can comprise one or more of a subscriber management system, a dedicated element to manage number porting, a clearinghouse porting server, a billing system, a provisioning system, or any other system that manages the number porting process for a service provider. Porting server 1154A communicates with porting server 1154B, which is associated with the subscriber's prior service provider, to request that the subscriber's telephone number be ported from the prior service provider to the new service provider. In some embodiments, porting server 1154A communicates directly with porting server 1154B. In some embodiments, porting server 1154A communicates with porting server 1154B via one or more intermediary servers or systems. In some embodiments, the one or more intermediary servers or systems are associated with a clearinghouse service to broker number porting requests between service providers.

Upon successful validation of the information associated with the subscriber's number porting request, porting server 1154B releases the association of the ported telephone number with the prior service provider and acknowledges the port phone number request to porting server 1154A. Once porting server 1154A receives the acknowledgement from porting server 1154B, porting server 1154A initiates a provisioning request to the current service provider's business/operational support systems (B/OSS) 1101. In some embodiments, provisioning of B/OSS 1101 includes provisioning programming server 1152 with the new device credentials and parameters. The new device credentials and parameters can comprise a phone number or mobile directory number (MDN), NAI, password, access point name (APN) configuration information (e.g., APN name, APN username, APN password, APN gateway, APN SMSC/ MMSC, APN type, etc.), username, IP address, MAC address, International Mobile Subscriber Identity (IMSI), Encryption Key (Ki), Wi-Fi SSID, Wi-Fi network configuration (e.g., AP name, AP IP address, AP username, AP password, AP encryption type, AP security key, etc.), or a combination of these. In some embodiments, provisioning of B/OSS 1101 includes provisioning of the network elements (e.g., HLR, HSS, 2A Server, gateway servers, authentication servers and systems, access control systems) to associate the new device credentials with subscriber 1010.

When device 100, using its existing credentials, attempts to authenticate or be authorized by the new service provid-55 er's network system 1100 for services, network system 1100 (shown in FIG. 15 as "Network") denies the request. When the one or more device agents receive the authentication or authorization failure, the one or more device agents automatically initiate a programming session with programming server 1152. In some embodiments, the one or more device agents assist in presenting (e.g., displaying a message through a device display or screen, providing an audible message through a speaker, etc.) a notification to subscriber 1010 prior to initiating the device reprogramming process. In some embodiments, the one or more device agents assist in causing device 100 to be rebooted prior to initiating the programming session, or they assist in notifying a user to

17

reboot device 100. In some embodiments, the one or more device agents assist in configuring device 100 with credentials to enable the programming session. During the programming session, the one or more device agents receive the updated device credentials or parameters, and the one or more agents update the device credentials or parameters with the credentials or parameters received from programming server 1152.

Upon completion of the programming session, device 100 can successfully authenticate with the new service provider's network system 1100 and be authorized for services. In some embodiments, upon completion of the programming session, the one or more device agents assist in rebooting device 100 to enable it to use the new credentials. In some embodiments, upon completion of the programming session, the one or more device agents assist in resetting the modem to enable device 100 to use the new credentials. In some embodiments, the one or more device agents assist in presenting (e.g., displaying a message through a device display or screen, providing an audible message through a speaker, etc.) a notification to subscriber 1010 to provide information related to the completion of the phone number nort.

Exemplary Use Case 1: Number Porting Information is 25 Pre-Stored on the Device Before the Number Porting Takes Place

In some embodiments, a user wishes to port a phone number associated with a second device (the "second phone number") to a first device. In some such embodiments, one or more device agents on the first device accept the second phone number and possibly other associated information about an account associated with the second device. The one or more device agents relay this information to a network element. In some embodiments, the one or more device 35 agents are then prepared for auto-reprogram to the second phone number by pre-storing on the first device at least a portion of the provisioning information needed to port the second phone number before the number port has taken place in the network-based subscriber management systems 40 and/or over-the-air (OTA) programming systems. In some embodiments, the one or more device agents are configured to detect a port initiation condition that indicates the porting process should be initiated, and the one or more device agents utilize the pre-stored information to assist in imple- 45 menting the number port. In some embodiments, the port initiation condition comprises a condition where a first phone number, assigned to the first device at the time the porting request is initiated, is no longer assigned to the first device. In some embodiments, determining that the first 50 phone number is no longer assigned comprises determining that the device cannot access a mobile network with the credentials associated with the first phone number. In some embodiments, the port initiation condition comprises a signal from the one or more network elements. In some 55 embodiments, the port initiation condition comprises determining that network access over a mobile network has been restricted or prevented.

In some embodiments, the one or more device agents accept the second phone number desired to be ported onto 60 the device, communicate the information to a network element, and prepare for auto-reprogram to the second phone number but do not re-program the device immediately. In some such embodiments, the one or more device agents wait for a condition in which the first phone number 65 is no longer valid and then automatically re-program the device and re-acquire the network.

18

Exemplary Use Case 2: Device Utilizes a Restricted Link Once the Number Porting has been Initiated

In some embodiments, a user wishes to port a phone number associated with a second device (the "second phone number") to a first device. In some such embodiments, one or more device agents on the first device assist in the porting of the second phone number. In some embodiments, when the porting of the second phone number port is approved and the second phone number is released from the second service provider, the one or more device agents have access via a restricted mobile network access policy to a network server associated with the one or more device agents, and this network server assists in porting the second phone number to the first device. In some embodiments, the network server provides OTA programming of the second phone number and possibly other parameters (e.g., other credentials). In some embodiments, after providing OTA programming, the network server causes the device to authenticate or re-authenticate to the network system.

In some embodiments, a limited-access-permission ambient (i.e., non-user-paid) service through the wireless access network is provided to enable devices that do not have a valid phone number or other network access credential to communicate with a programming server. In some such embodiments, some or all devices that are not recognized by the network authentication system have access to a server that can re-provision a device's phone number, other network access credentials, or other network access configuration if a number port has been authorized and/or completed for the device.

In some embodiments, at some point in number porting process a subscriber management system associated with the first device provisions the network elements to reflect the second phone number and/or device access credentials, and at that point a policy allows the first device to have limited network access to communicate with the programming server, even if the first device has a partially invalid credential or set of credentials.

Exemplary Use Case 3: The Mobile Network Recognizes Two Numbers for the First Device, at Least for a Period of Time

In some embodiments, a user wishes to port a phone number associated with a second device (the "second phone number") to a first device that, at the time the porting request is initiated, is associated with a first phone number. In some such embodiments, one or more device agents on the first device assist in the porting of the second phone number. In some embodiments, the network system is configured to allow the first device to access the network system with credentials associated with the first phone number and with credentials associated with the second phone number, at least for a period of time. In some such embodiments, when the number port is complete, and the first device accesses the network with credentials associated with the first phone number, the programming server or other network element signals to the first device (e.g., sends an SMS message to the one or more device agents, sends a data transport message to the one or more device agents, etc.) that the device requires reprogramming. In some embodiments, the one or more device agents initiate communications with the programming server to retrieve the new network access credentials (e.g., the credentials associated with the second phone number). In some embodiments, the new credentials are pre-stored on the first device, and the first device automatically reprograms itself without contacting the programming server.

#: 794

Document 65-1

19

In some embodiments, it is also desirable to update another configuration of the first device, including, for example, an application configuration. In some embodiments, there are certain applications that use device-related credentials to access a service where the service associates 5 a device or user with a set of well-known credentials (e.g., a voice mail application). In some embodiments, when the phone number or other credential associated with the first device changes, the applications that use device credentials must communicate the device or subscriber credential 10 change to the service. In some embodiments, a network element (e.g., provisioning server, programming server, subscriber management server, etc.) assists in updating the service with the new device credential. In some embodiments, the device application is required to log in, authen- 15 ticate, or associate the user's service with the new credential. In some embodiments, the re-authentication, log in, or service association occurs automatically without user intervention. In some embodiments, prior to the re-authentication, log in, or service association with the new credential, 20 the user is required to enter a valid PIN, password, or other credential to authorize the change to the service credentials. In some embodiments, the service credentials include access credentials. In some embodiments, the service credentials include account credentials or information (e.g., phone num- 25 ber for voice mail account, etc.)

In some embodiments, an already-resident or downloaded application exists on the user's current device. In some embodiments, the application assesses usage and determines if there is a better service offer (i.e., a service offer that 30 would reduce costs to the user or that would otherwise benefit the user). In some embodiments, the better service offer is a service offer with the user's current service provider (i.e., the service provider associated with the user's current device). In some embodiments, the better service 35 offer is with a different service provider. In some embodiments, the application provides information about the better service offer to the user through the device UI (e.g., by presenting information through a display, by providing an audible notification, etc.). In some embodiments, the appli- 40 cation accepts a user indication that user wishes to accept the better service offer, and accepts billing information. In some embodiments, the application communicates that the user wishes to accept the service offer and billing information to a network element. In some embodiments, the network 45 more processors to: element is on the current service provider's network. In some embodiments, the network element is on the new service provider's network (i.e., the network operated by the service provider making the service offer that the user wishes to accept). In some embodiments, the network ele- 50 ment is on a third-party network that is not owned by either the current service provider or the new service provider (e.g., the network element is on an independent agent/broker network). In some embodiments, the network element initiates the shipment of a new device (e.g., a new device 55 providing the better service offer is sent or made available to the user). In some embodiments, when the user receives the new device, the user can either initiate number porting from an application that runs during initial device set up or via the one or more device agents on the new device.

In some embodiments, the user can enter the information to port a phone number through a website (either prior to activating service or once service is activated). In some embodiments, where the information is entered using a website, the one or more device agents are automatically triggered by a message communicated over the wireless network by a network element to initiate the number port

20

(e.g., SMS message, USSD message, application push message (Google Cloud Messaging (GCM), Apple Push Notification Service (APNS), etc.)). In some embodiments, the one or more device agents assist in prompting the user to confirm the port request. In some embodiments, the port is initiated automatically in the background with no user intervention. In some embodiments, where the user enters the porting information through a website, the one or more device agents present the porting information through the device UI and at least assist in querying the user to verify and/or edit the porting information on the mobile device prior to initiating the port.

What is claimed is:

1. A wireless device, comprising:

a user interface;

memory configured to store:

one or more credentials associated with the wireless device, the one or more credentials for authorizing the wireless device to use a wireless access network to access one or more services, and

a target credential; and

one or more processors configured to execute one or more machine-executable instructions that, when executed by the one or more processors, cause the one or more processors to:

obtain, through the user interface, an indication of a user request to replace a particular credential of the one or more credentials with the target credential,

detect a network-provisioning state change, and

based on the detected network-provisioning state change, automatically

determine that the particular credential does not match the target credential,

initiate a programming session with a network element communicatively coupled to the wireless device over the wireless access network,

obtain an updated credential from the network ele-

assist in storing, in memory, the updated credential as the particular credential.

2. The wireless device recited in claim 1, wherein, when executed by the one or more processors, the one or more machine-executable instructions further cause the one or

determine that the updated credential does not match the target credential, and

based on the determination that the updated credential does not match the target credential, take an action.

- 3. The wireless device recited in claim 2, wherein the action is to communicate with the network element.
- 4. The wireless device recited in claim 2, wherein the action is to cause a notification to be presented through the user interface, wherein the notification reports an error.
- 5. The wireless device recited in claim 2, wherein the action is to cause a notification to be presented through the user interface, wherein the notification reports that a procedure is in progress or has not been completed.
- 6. The wireless device recited in claim 2, wherein the 60 action is to at least assist in restricting communications by the wireless device over the wireless access network.
 - 7. The wireless device recited in claim 1, wherein, when executed by the one or more processors, the one or more machine-executable instructions further cause the one or more processors to:

determine that the updated credential matches the target credential, and

#: 795

Document 65-1

21

based on the determination that the updated credential matches the target credential, take an action.

- 8. The wireless device recited in claim 7, wherein the action is to cause a notification to be presented through the user interface, wherein the notification reports that the 5 particular credential has been replaced by the target creden-
- 9. The wireless device recited in claim 1, wherein, when executed by the one or more processors, the one or more machine-executable instructions further cause the one or 10 more processors to cause a notification to be presented through the user interface, the notification providing information about a status of the user request to replace the particular credential of the one or more credentials with the target credential.
- 10. The wireless device recited in claim 1, wherein, when executed by the one or more processors, the one or more machine-executable instructions further cause the one or more processors to cause a notification to be presented through the user interface, the notification requesting con- 20 firmation of the user request to replace the particular credential with the target credential.
- 11. The wireless device recited in claim 1, wherein detecting the network-provisioning state change comprises determining that a registration attempt initiated by the 25 wireless device has failed.
- 12. The wireless device recited in claim 1, wherein detecting the network-provisioning state change comprises determining that an attempt by the wireless device to place a voice call has failed.
- 13. The wireless device recited in claim 1, wherein detecting the network-provisioning state change comprises determining that an attempt by the wireless device to send a text message has failed.
- 14. The wireless device recited in claim 1, wherein 35 detecting the network-provisioning state change comprises determining that an attempt by the wireless device to authenticate with the network element has failed.
- 15. The wireless device recited in claim 1, wherein detecting the network-provisioning state change comprises 40 determining that an attempt by the wireless device to be authorized for a service has failed.
- 16. The wireless device recited in claim 1, wherein detecting the network-provisioning state change comprises determining that a network access error has occurred.
- 17. The wireless device recited in claim 1, wherein detecting the network-provisioning state change comprises receiving a provisioning-state-change message.
- 18. The wireless device recited in claim 17, wherein the provisioning-state-change message comprises a text mes- 50 sage.
- 19. The wireless device recited in claim 17, wherein the provisioning-state-change message comprises a push message from a push server communicatively coupled to the wireless device over the wireless access network.
- 20. The wireless device recited in claim 17, wherein the provisioning-state-change message comprises a message received by an application program on the wireless device.
- 21. The wireless device recited in claim 1, wherein the one or more credentials comprise a phone number.
- 22. The wireless device recited in claim 1, wherein the one or more credentials comprise an international mobile subscriber identifier (IMSI), a mobile station identifier (MSID), a mobile station international ISDN number (MSISDN), a subscriber information module (SIM) identifier, an electronic serial number (ESN), a mobile equipment identifier (MEID), an international mobile equipment iden-

22

- tity (IMEI), a device identifier, a subscriber identifier, a service account identifier, a media access control (MAC) address, an Internet protocol (IP) address, a token, a onetime token, a mobile directory number (MDN), a network access identifier (NAI), a user name, a password, access point name (APN) configuration information, an encryption key (Ki), a Wi-Fi service set identifier (SSID), a Wi-Fi network configuration, an IP address, or a combination of these.
- 23. The wireless device recited in claim 1, wherein the target credential comprises a phone number.
- 24. The wireless device recited in claim 1, wherein the target credential comprises an international mobile subscriber identifier (IMSI), a mobile station identifier (MSID), a mobile station international ISDN number (MSISDN), a subscriber information module (SIM) identifier, an electronic serial number (ESN), a mobile equipment identifier (MEID), an international mobile equipment identity (IMEI), a device identifier, a subscriber identifier, a service account identifier, a media access control (MAC) address, an Internet protocol (IP) address, a token, a one-time token, a mobile directory number (MDN), a network access identifier (NAI), a user name, a password, access point name (APN) configuration information, an encryption key (Ki), a Wi-Fi service set identifier (SSID), a Wi-Fi network configuration, an IP address, or a combination of these.
- 25. The wireless device recited in claim 1, wherein the particular credential comprises a first phone number currently associated with the wireless device, and wherein the target credential comprises a second phone number.
- 26. The wireless device recited in claim 25, wherein the wireless device is a first wireless device, and wherein the second phone number is, prior to the user request to replace the particular credential with the target credential, associated with a second wireless device.
- 27. The wireless device recited in claim 25, wherein the second phone number is, prior to the user request to replace the particular credential with the target credential, associated with a land line.
- 28. The wireless device recited in claim 1, wherein the user interface comprises a display.
- 29. The wireless device recited in claim 1, wherein the user interface comprises a speaker.
- 30. The wireless device recited in claim 1, wherein the one or more services comprise a voice service, a messaging service, or a data service.
- 31. The wireless device recited in claim 1, wherein the one or more machine-executable instructions comprise an application program.
- 32. The wireless device recited in claim 1, wherein the one or more machine-executable instructions comprise an operating system (OS) component, an OS function, an OS service, a modem programming agent, a modem software or 55 firmware agent, an over-the-air (OTA) mobile device parameter programming agent, an Open Mobile Alliance (OMA) agent, a secure communication agent configured to communicate number porting and number provisioning information, a software agent, a firmware agent, or a combination of these.
 - 33. The wireless device recited in claim 1, wherein the user request comprises an indication of the target credential, a phone number, a user name, a password, an account number, a subscriber name, a company name, at least a portion of a billing address, at least a portion of a social security number, a personal identification number (PIN), or a combination of these.

23

- 34. The wireless device recited in claim 1, wherein obtaining the indication of the user request to replace the particular credential of the one or more credentials with the target credential comprises obtaining information from a website.
- 35. The wireless device recited in claim 1, wherein obtaining the indication of the user request to replace the particular credential of the one or more credentials with the target credential comprises obtaining information associated with the user request through the user interface.
- 36. The wireless device recited in claim 1, wherein the network element comprises a programming server.
- 37. The wireless device recited in claim 1, wherein initiating the programming session with the network element communicatively coupled to the wireless device over the 15 wireless access network comprises contacting the network element using at least a portion of the one or more credentials associated with the wireless device.
- 38. The wireless device recited in claim 1, wherein initiating the programming session with the network element 20 communicatively coupled to the wireless device over the wireless access network comprises contacting the network element using a temporary credential.
- 39. The wireless device recited in claim 38, wherein, when executed by the one or more processors, the one or 25 more machine-executable instructions further cause the one or more processors to obtain the temporary credential from memory.
- 40. The wireless device recited in claim 38, wherein, when executed by the one or more processors, the one or 30 more machine-executable instructions further cause the one or more processors to obtain the temporary credential from a network system communicatively coupled to the wireless
- 41. The wireless device recited in claim 1, wherein 35 initiating the programming session with the network element communicatively coupled to the wireless device over the wireless access network comprises contacting the network element using a default credential.
- 42. The wireless device recited in claim 1, wherein 40 initiating the programming session with the network element communicatively coupled to the wireless device over the wireless access network comprises communicating with the network element over the wireless access network.

24

- 43. The wireless device recited in claim 1, wherein initiating the programming session with the network element communicatively coupled to the wireless device over the wireless access network comprises communicating with the network element over a Wi-Fi network.
- 44. The wireless device recited in claim 1, wherein initiating the programming session with the network element communicatively coupled to the wireless device over the wireless access network comprises communicating with the network element through a voice call.
- 45. The wireless device recited in claim 1, wherein, when executed by the one or more processors, the one or more machine-executable instructions further cause the one or more processors to at least assist in restricting communications over the wireless access network until the updated credential has been obtained.
- 46. The wireless device recited in claim 1, wherein the target credential comprises a configuration state indicator.
- 47. A non-transitory computer-readable storage medium storing one or more machine-executable instructions that, when executed by one or more processors of a wireless device, cause the one or more processors to:
 - obtain, through a user interface, an indication of a user request to replace a particular credential of one or more credentials, for authorizing the wireless device to use a wireless access network to access one or more services, with a target credential;

detect a network-provisioning state change; and

- based on the detected network-provisioning state change, automatically determine that the particular credential does not match the target credential,
 - initiate a programming session with a network element communicatively coupled to the wireless device over a wireless access network,
 - obtain an updated credential from the network element,
 - assist in storing, in memory, the updated credential as the particular credential.
- 48. The wireless device of claim 1, wherein the memory configured to store the one or more credentials comprises a protected memory that does not allow direct user modification of the particular credential.